


DESHA COUNTY, ARKANSAS
WKMM - WATER SYSTEM IMPROVEMENTS


BID PROPOSAL

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
1	1	L.S.	Furnish and Install labor, equipment, and material for one 6" Type 2 creek crossing (440 LF) per plans and specifications for the lump sum price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.S.		
2	1	EA.	Tie in Existing 6" Water Line per plans and specifications for the unit price of (Does not include valve) (Not a Pay Item if Tapping Sleeve or Saddle is used)	\$ _____	\$ _____
			_____ Dollars and _____ Cents/EA.		
3	1	EA.	Furnish and Install 6"X2" M.J. Tapping Sleeve and Valve including valve box and blocking per plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/EA.		

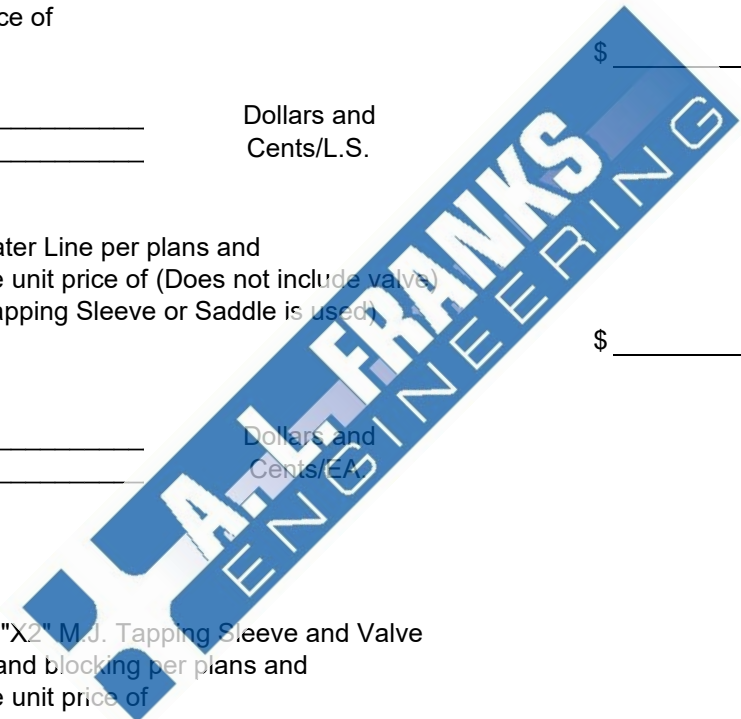


BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
4	1	EA.	Furnish and Install 6" Gate Valve including valve box, valve marker and blocking per plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/EA.		
5	160	EA.	Furnish and Install ¾" Meter with Smart Register and Transmitter, meter box, meter setter and appurtenances for fully functional drive-by system per plans and specifications for the unit price of (Does not include service line)	\$ _____	\$ _____
			_____ Dollars and _____ Cents/EA.		
6	7	EA.	Furnish and Install 2" Meter with Smart Register and Transmitter, meter box, meter setter and appurtenances for fully functional drive-by system per plans and specifications for the unit price of (Does not include service line)	\$ _____	\$ _____
			_____ Dollars and _____ Cents/EA.		

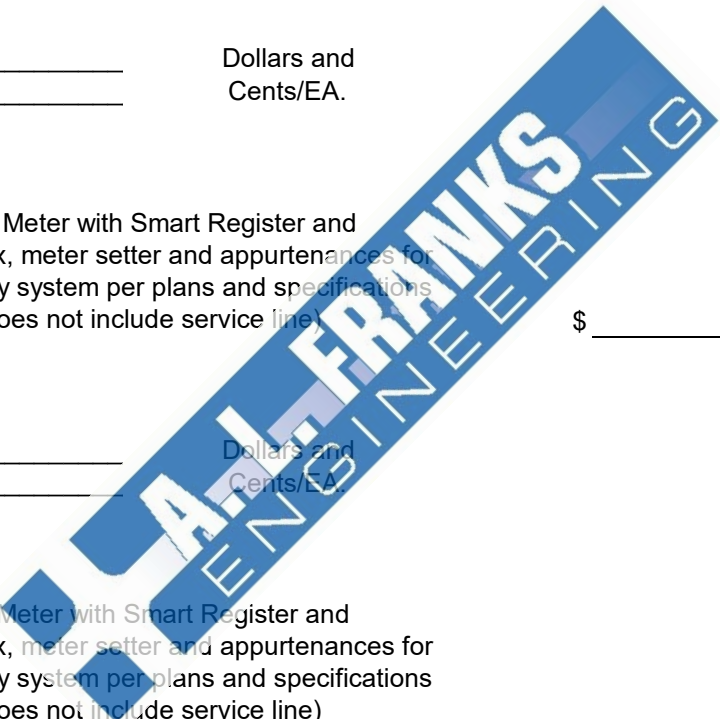

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
7	1	L.S.	Furnish all labor and install all equipment necessary for a complete and operational Drive-By Metering system including laptop (windows 10 operating system with 3G processor at minimum), handheld, software, and appurtenances per plans and specifications for the lump sum price of _____ Dollars and _____ Cents/L.S.	\$ _____	\$ _____
TOTAL OF ALL ITEMS (1-7)				\$ _____	_____

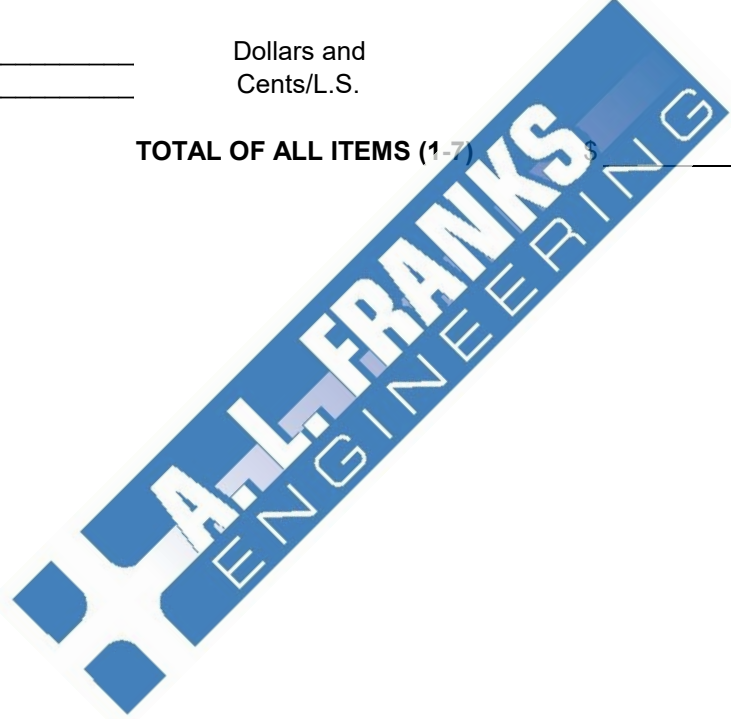

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
<u>DEDUCTIVE ALTERNATE ITEMS</u>					
1	160	EA.	Deduct from Item 5 - Meter Box, Meter Setter - Furnish and Install ¾" Meter with Smart Register, Transmitter, and appurtenances for fully functional drive-by system per plans and specifications for the unit price of (Does not include service line)	\$ _____	\$ _____
			_____ Dollars and _____ Cents/EA.		
2	7	EA.	Deduct from Item 6 - Meter Box, Meter Setter - Furnish and Install 2" Meter with Smart Register, Transmitter, and appurtenances for fully functional drive-by system per plans and specifications for the unit price of (Does not include service line)	\$ _____	\$ _____
			_____ Dollars and _____ Cents/EA.		
			TOTAL DEDUCTIVE ITEMS	\$ _____	
			TOTAL BASE LESS DEDUCTIVE ITEMS	\$ _____	

NOTES

- 1) Miscellaneous items, directed work, connections, caps, and kill outs, etc., not specifically listed but required to complete the proposed improvements to a complete and operational system shall be included in the Bid under the most appropriate Bid Item.
- 2) Time required to complete base bid work shall be 120 calendar days.
- 3) Contractor is solely responsible for the complete abandonment of all existing mains unless otherwise noted.