


SEIVER COUNTY WATER ASSOCIATION

10" Water Main Loop Improvements


BID PROPOSAL

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
1	1	L.S.	Furnish and Install 10" Meter Vault to include 8" Sensus Turbo T2 Meter, 3-10" Gate Valves, concrete vault, 10" By-pass, S.S Manway, and all necessary piping and appurtenances for the lump sum price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.S.		
2	24015	L.F.	Furnish and Install 10" Water Main (HDPE DR-11), fittings, including trench excavation, laying, bedding, blocking and backfilling per plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.F.		

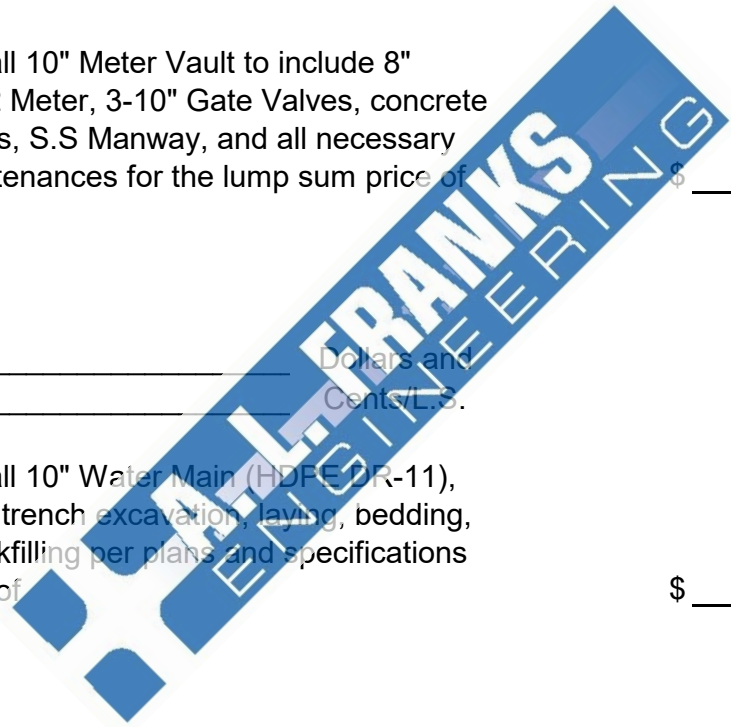

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
3	1	EA	Tie-in existing 16" PVC water main to proposed 10" HDPE water main to proposed water main per plans and specifications for the unit price of	_____ Dollars and Cents/EA	\$ _____
4	75	L.F.	Furnish and Install Type 2 creek crossing for 10" water main per plans and specifications for the unit price of	_____ Dollars and Cents/L.F.	\$ _____

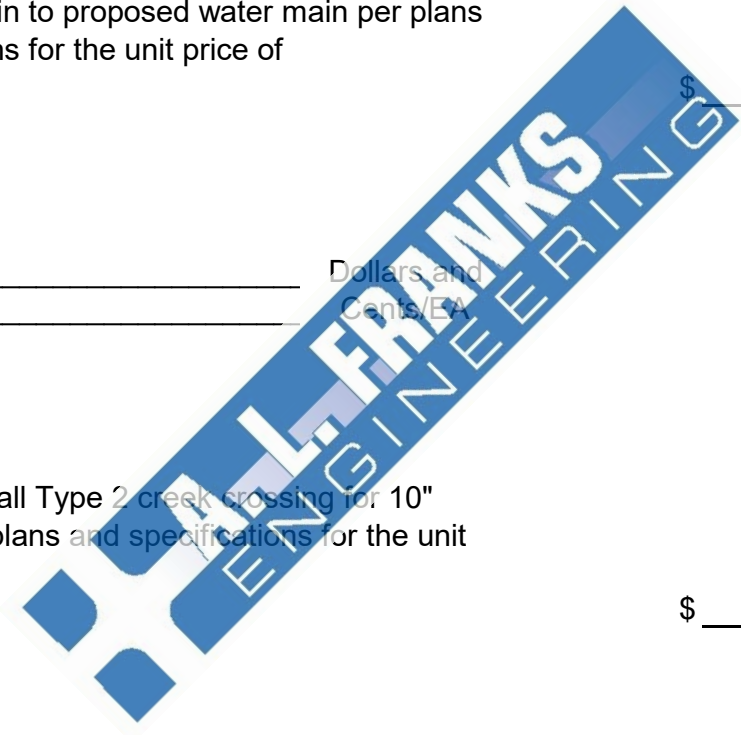


BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
5	5	EA	Furnish and Intall 6" Blow-Off Assembly per plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/EA		
6	8	EA	Furnish and Install 2" Air/Vacuum Release Assembly per plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/EA		


BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
7	475	L.F.	Furnish and Install Type 1 creek crossing for 10" water main per plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.F.		
8	6	EA	Furnish and Install 10" Gate Valve including valve box and blocking per plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/EA.		

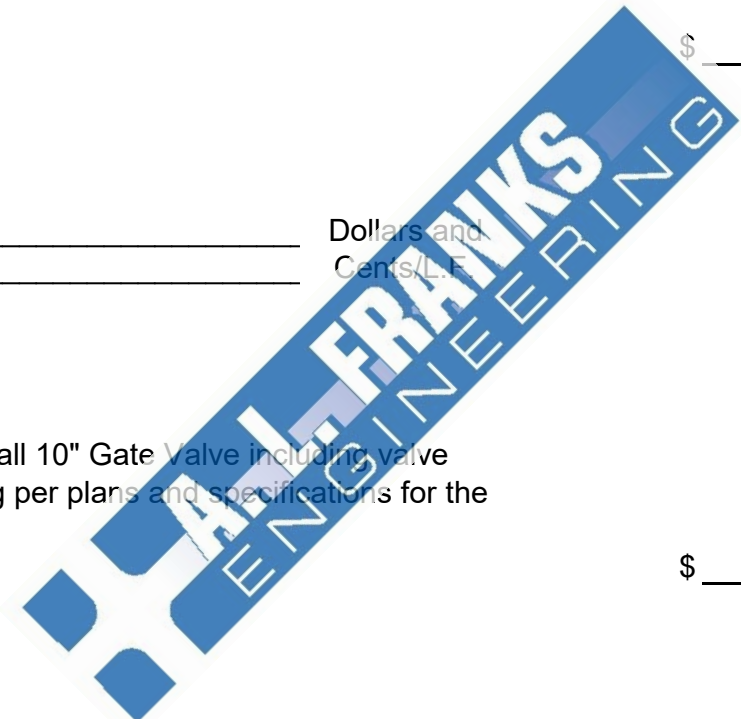


BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
9	270	L.F.	Furnish and Install 10" Water Main (HDPE DR-11), BY DIRECTIONAL BORE, fittings, including trench excavation, laying, bedding, blocking and backfilling per plans and specifications for the unit price of (directional bore includes the pipe)	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.F.		
10	1	L.S.	Tie-in proposed 10" HDPE water main to existing 6" PVC water main per plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.S.		

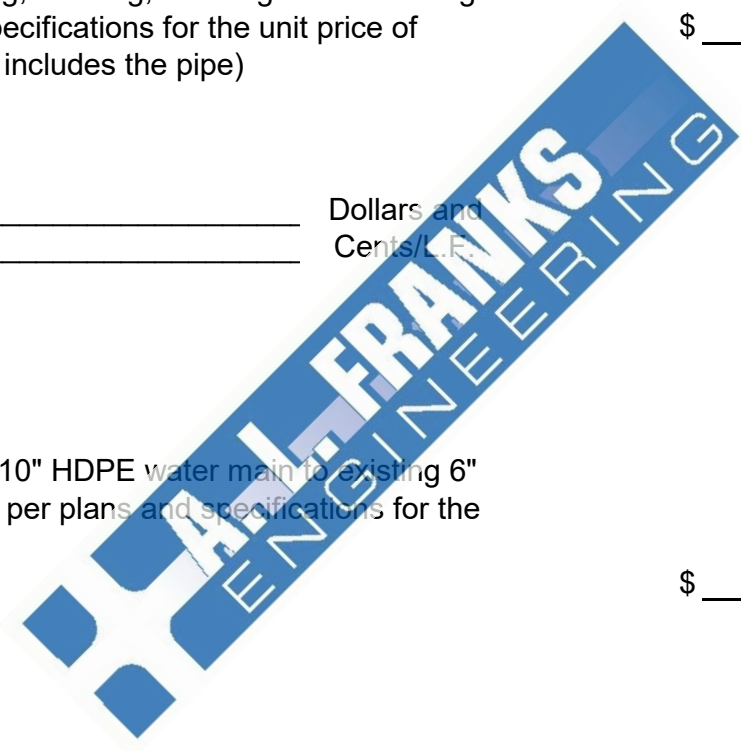


BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
11	1	EA	Furnish and Install 6" Gate Valve including valve box, valve marker and blocking per plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/EA		
12	1	EA	Furnish and Install 4" Gate Valve including valve box, valve marker and blocking per plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/EA		

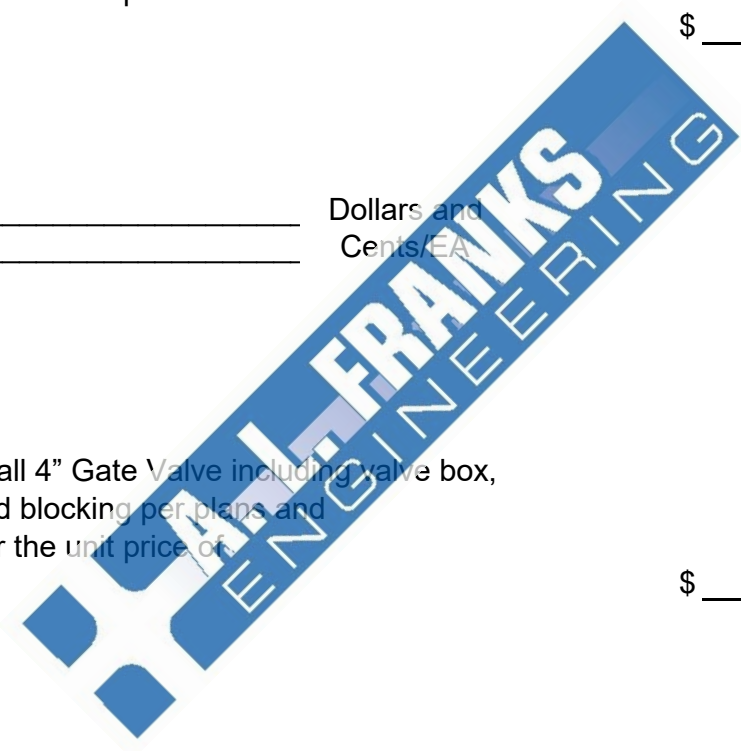


BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
13	1	L.S.	Clear and Grubbing per plans and specifications for the unit price of (to include removal of debris, as necessary)	\$ _____	\$ _____
			_____ Dollars and _____ Cents/LS		
14	1	L.S.	Replant grass on ROW (Grass seed should match the existing) per plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/LS		

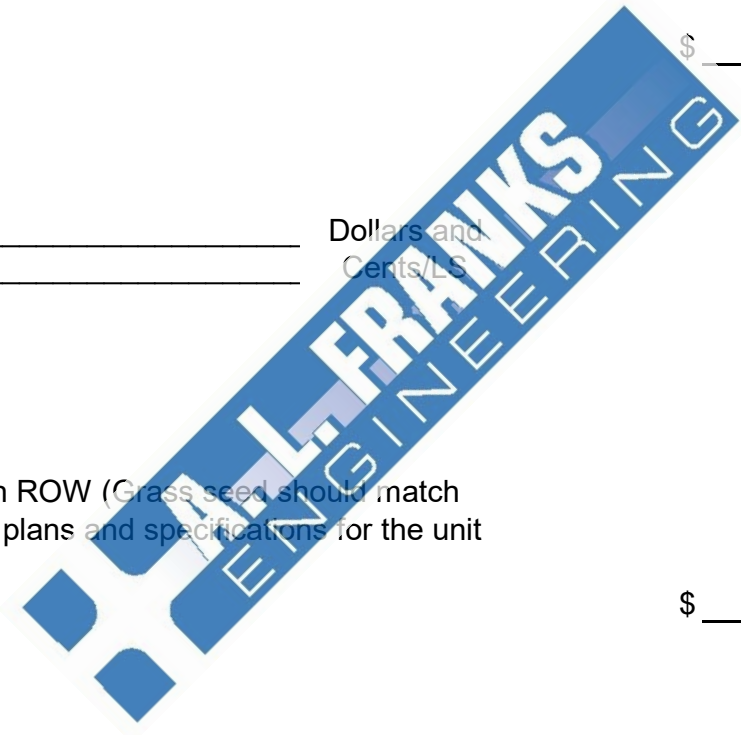


BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
15	1	L.S.	Trench Safety per plans and specifications for the lump sum price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/LS		
16	1	L.S.	Furnish and Install all equipment, materials, and labor to impement and maintain the stormwater pullution preparedness plan (SWPPP) including re-seeing all disturbed areas per plans and specifications for the lump sum price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/LS		

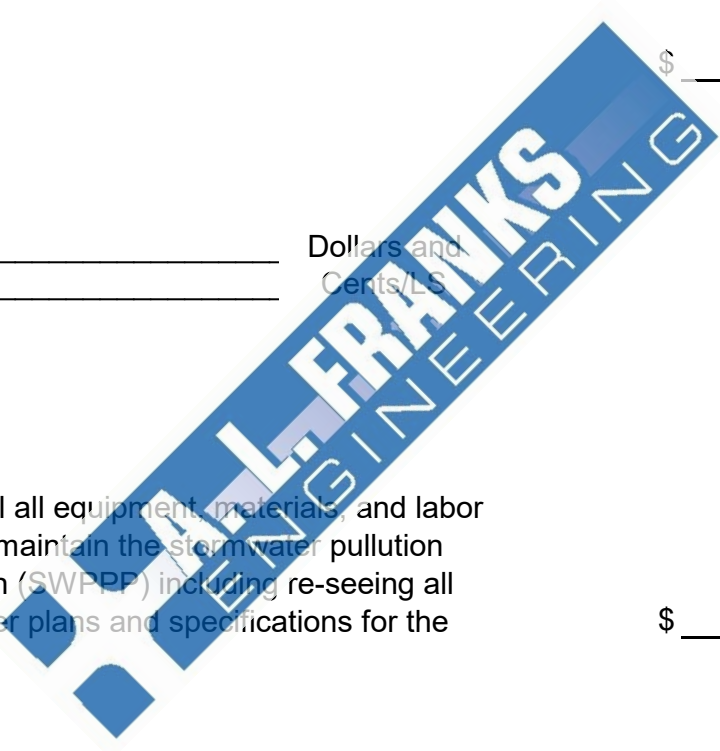

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
17	1	L.S.	Furnish all labor and intall equipment for testing and sterilization of treated mains and appurtenances per plans and specifications for the Imp sum price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/LS		
18	1	L.S.	Mobilization including preparatory work and operations, including but not limited to, movement of personnel, equipment, supplies, and incidentals to the project site for the lump sum price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/LS		
TOTAL BASE BID				\$ _____	

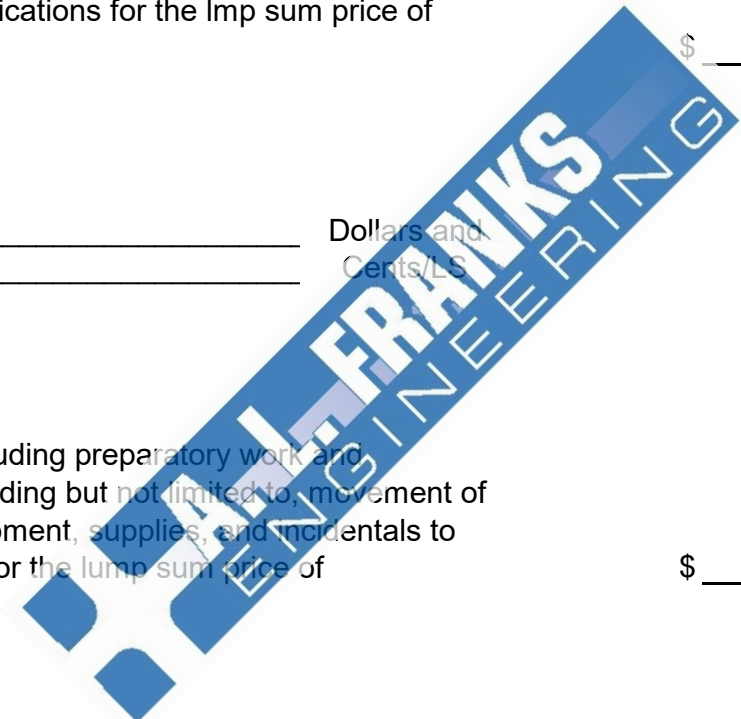

BID PROPOSAL CONTINUED

NOTES

- 1) Miscellaneous items, directed work, connections, etc., not specifically listed but required to complete the proposed improvements to a complete and operational system shall be included in the Bid under the most appropriate Bid Item.
- 2) Time required to complete base bid work shall be 130 calendar days.
- 3) Contractor is solely responsible for the complete abandonment of all existing mains unless otherwise noted.
- 4) Contractors shall expect Type 2 laying conditions.

