


CITY OF DIERKS, ARKANSAS
WATER SYSTEM IMPROVEMENTS
BID PROPOSAL

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
1	1155	L.F.	Furnish and Install 3" Water Main (PVC SDR-21), Fittings, including trench excavation, laying, bedding, blocking and backfilling per plans and specifications for the unit price of _____ Dollars and _____ Cents/L.F.	\$ _____	\$ _____
2	1	EA	Furnish and Install 3" Gate Valve including valve box and blocking per plans and specifications for the unit price of _____ Dollars and _____ Cents/EA	\$ _____	\$ _____

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
3	1	EA	Tie-in 3" to existing 6" water main to proposed main per plans and specifications for the unit price of	_____ Dollars and Cents/EA	\$ _____
4	225	L.F.	Furnish and Install 6" Water Main (HDPE DR-11), Fittings, including trench excavation, laying, bedding, blocking and backfilling per plans and specifications for the unit price of	_____ Dollars and Cents/L.F.	\$ _____

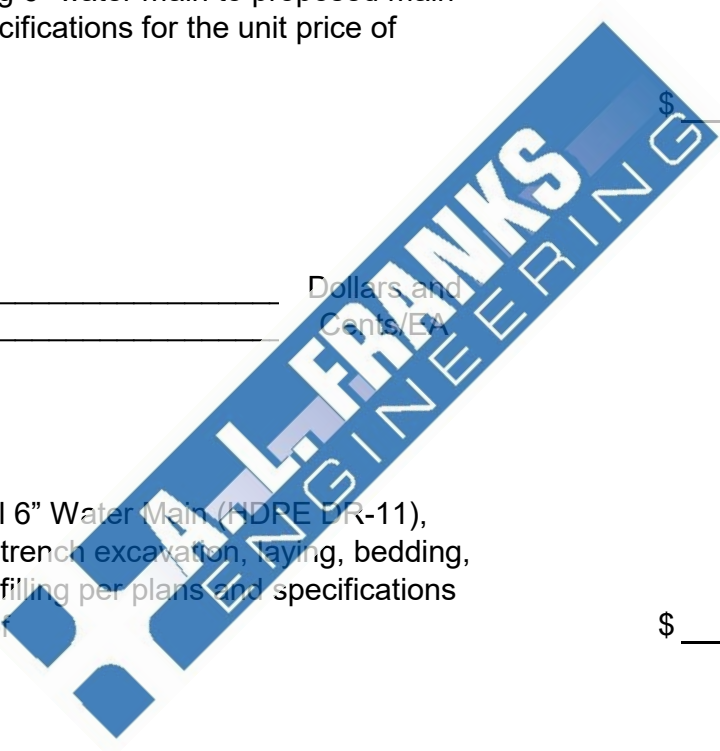


BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
5	200	L.F.	Furnish and Install Type 1 creek crossing for 6" water main per plans and specifications for the unit price of	\$ _____ _____ Dollars and Cents/L.F.	\$ _____
6	2	EA	Tie-in 6" to existing 6" water main to proposed main per plans and specifications for the unit price of	\$ _____ _____ Dollars and Cents/EA	\$ _____


BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
7	2	EA	Furnish and Install 6" X 3" tapping sleeve and valve assembly per plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/EA		
8	6175	L.F	Furnish and install 8" C-900 treated water main and fittings including trench excavation, laying, bedding, blocking, and backfilling per plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.F.		

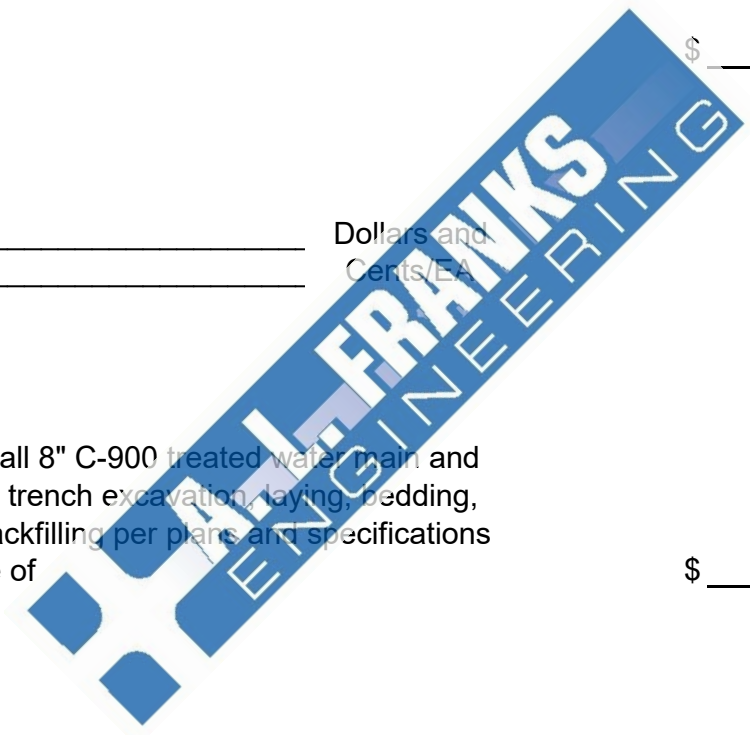


BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
9	4	EA	Furnish and Install 8" Gate Valve including valve box and blocking per plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/EA		
10	4	EA	Tie-in 8" to existing 8" water main to proposed main per plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/EA		

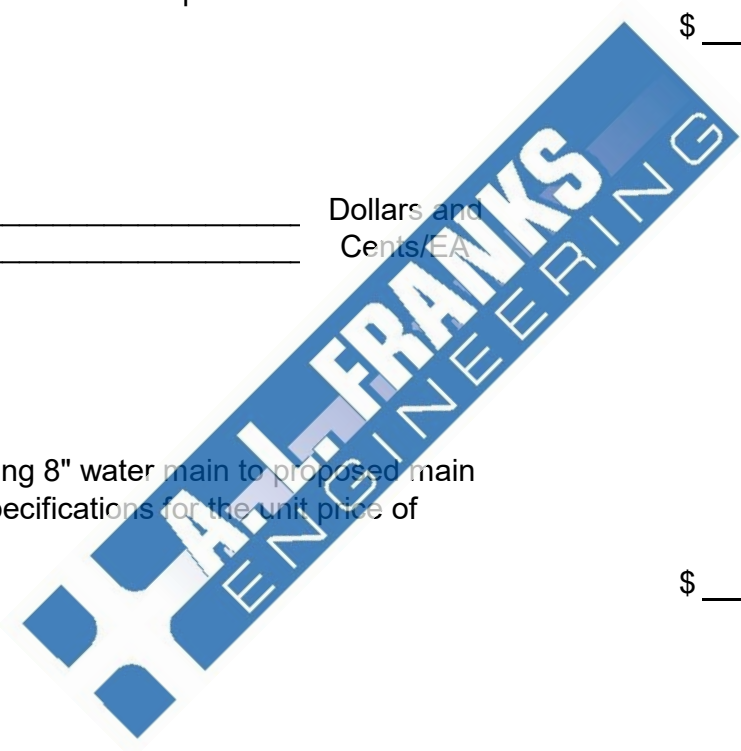

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
11	1	EA	Furnish and Install 2" Blow-Off Valves with valve marker per plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/EA		
12	5	EA	Re-connect Existing 3/4" Short Side Water Service to main per plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/EA		

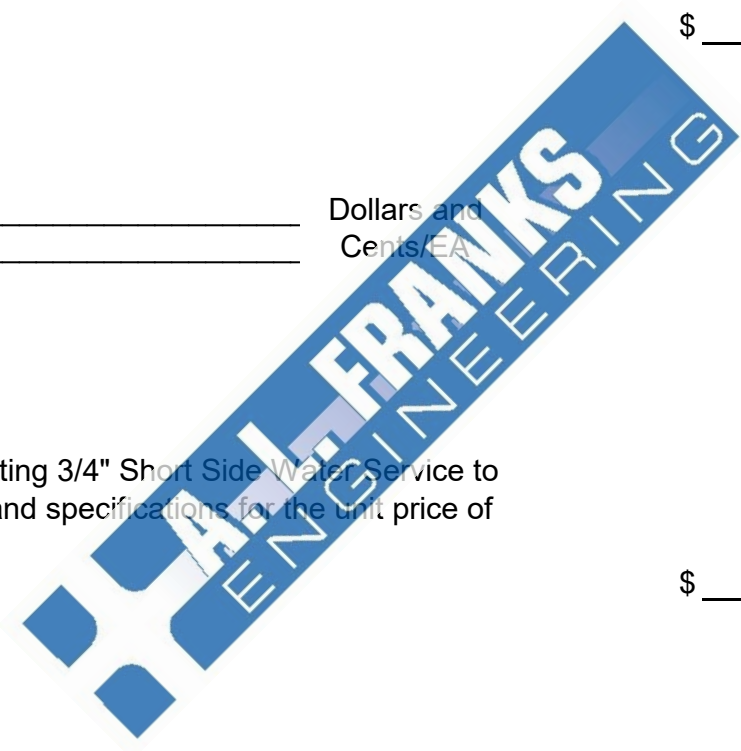


BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
13	5	EA	Re-connect Existing 3/4" Long Side Water Service to main per plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/EA		
14	1	L.S.	Furnish and Install 60 KW Emergency Generator with concrete pad, manual transfer switch, emergency lighting, including all electrical, conduit, wiring, diesel fuel, and appurtenances as described in the plans and specifications for the lump sum price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/LS		

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
15	150	L.F.	Open Cut and Repair Asphalt Surface per plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/LF		
16	1	L.S.	Clear and grubbing per plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/LS		

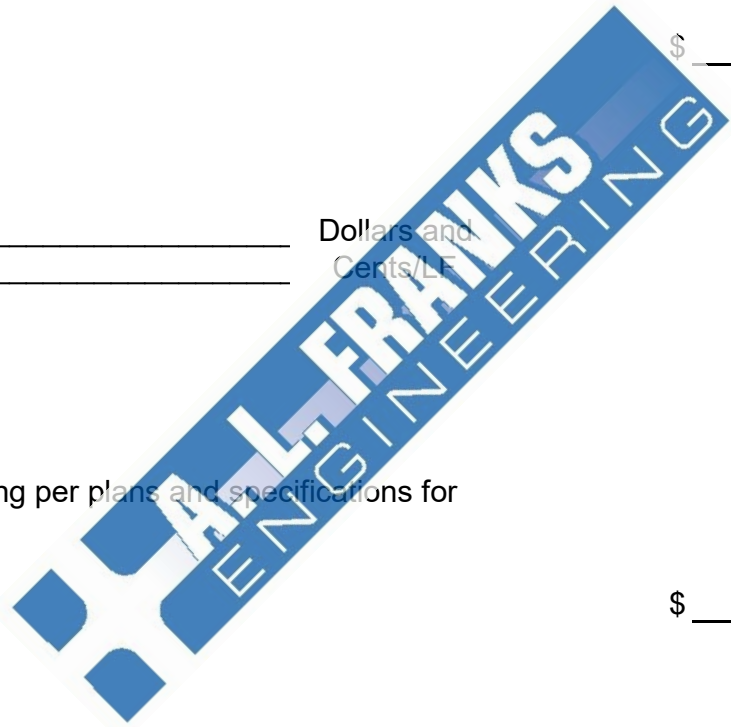

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
17	1	L.S.	Furnish all labor and install equipment for testing and sterilization of treated mains and appurtenances per plans and specifications for the lump sum of _____ Dollars and _____ Cents/LS	\$ _____	\$ _____
18	1	L.S.	Mobilization including preparatory work and operations, including but not limited to, movement of personnel, equipment, supplies, and incidentals to the project site for the lump sum price of _____ Dollars and _____ Cents/EA	\$ _____	\$ _____

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
19	1	L.S.	Cut and Cap existing water mains as necessary per plans and specifications for the lump sum of		
				\$ _____	\$ _____
			_____ Dollars and _____ Cents/LS	_____	_____
			TOTAL BASE BID	\$ _____	
			DEDUCTIVE ALTERNATE		
20	1500	L.F.	DEDUCT- 8" C-900 PVC treated water main and fittings including trench excavation, laying, bedding, blocking, and backfilling per plans and specifications for the unit price of		
				\$ _____	\$ _____
			_____ Dollars and _____ Cents/LF		
			TOTALBASE LESS DEDUCTIVE	\$ _____	