
CITY OF MCGEHEE, ARKANSAS


WATER IMPROVEMENTS


BID PROPOSAL

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
1	5,680	L.F.	Furnish and Install material, labor and equipment for 4" C-900 PVC Water Main and Fittings including Trench Excavation, Laying, Bedding, Blocking and Backfilling per plans and specifications for the unit price of (INCLUDING PIPE PRICE)	\$	\$
			Dollars and Cents/L.F		
2	1,400	L.F.	Directional Bore 4" Certa-Loc Pipe DR-18 Water main per plans and specifications for the unit price of (Directional Bore includes the pipe)		
			Dolars and	\$	\$
3	5	EA	Cents/L.F Furnish and Install 6"X4" M.J. Tapping Sieeve and Valve including valve box and blocking per plans and specifications for the unit price of		
				\$	\$
			Dollars and Cents/EA		
			P-2		

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
3	5	EA	Furnish and Install 6"X4" M.J. Tapping Sleeve and Valve including valve box and blocking per plans and specifications for the unit price of	\$	\$
			Dollars and Cents/EA	GØ	
4	11	EA	Furnish and Install 4" Flush Hydrant Assembly including 4" Gate Valve, Blocking and Drain Rock per plans and specifications for the unit price of Dollars and Cents EA	\$	\$
5	7	EA	Furnish and Install 6" Fire Hydrant Assembly including 6" Gate Valve, Blocking and Prain Rock per plans and specifications for the unit proceed Dollars and Cents/EA	\$	\$
6	4	EA	Remove existing Fire Hydrants and deliver to the City of McGehee	\$	\$
			Dollars and Cents/EA P-3	Ŧ	*

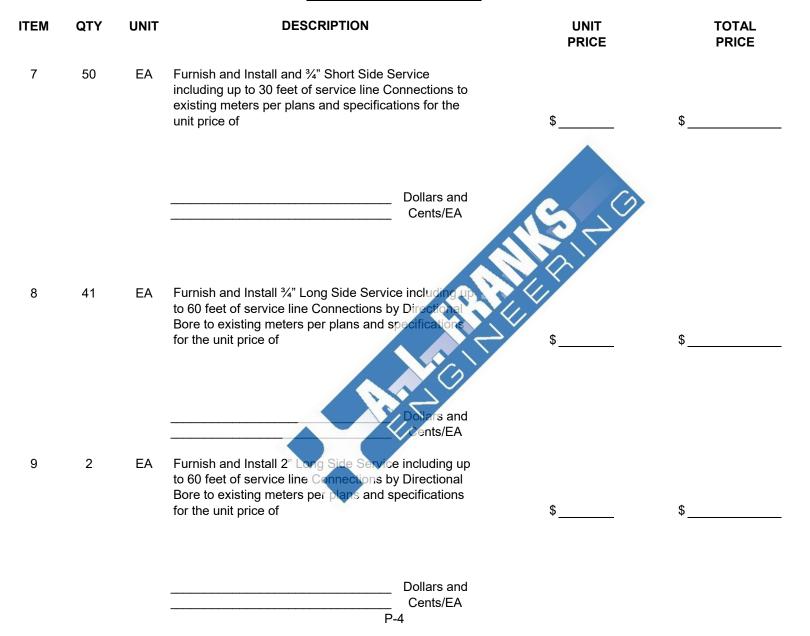

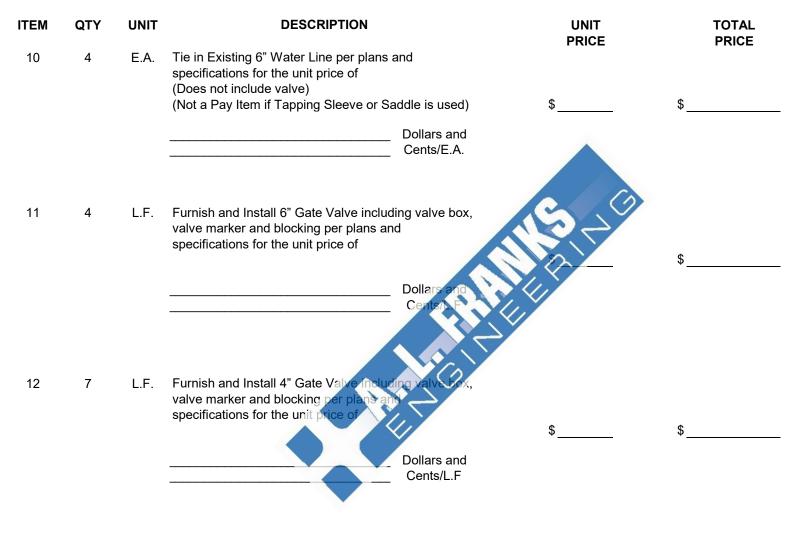

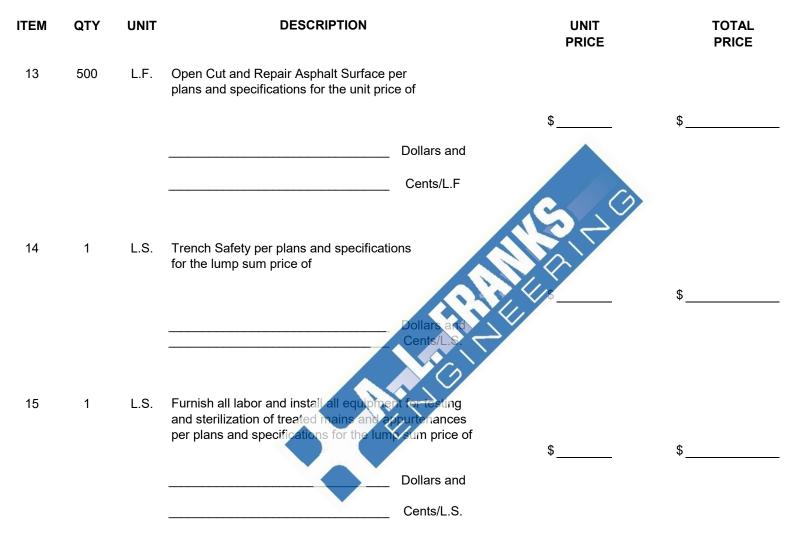

P-6

ITEM	QTY	UNIT	BID PROPOSAL CONTINUED DESCRIPTION	UNIT PRICE	TOTAL PRICE
16	1	L.S.	Furnish and install material, labor and equipment to rehab existing water treatment building and site at Water Tower per plans and specifications for the unit price of	\$	\$
			Dollars and Cents/L.S.		
17	1	LS	Furnish and install material, labor and equipment to rehab existing water treatment building and site at Fire Station per plans and specifications for the unit price of Dollars and Cents/b.S.		\$
18	1	LS	Furnish and install material, labor and equipment to rehab existing water treatment building and site at North 1st (First) Street per plans and specifications for the unit price of Pollars and Cents/L.S.	\$	\$
			TOTAL OF ALL ITEMS P-7	\$	

NOTES

1) Miscellaneous items, directed work, connections, etc., not specifically listed but required to complete the proposed improvements to a complete and operational system shall be included in the Bid under the most appropriate Bid Item.

2) Time required to complete base bid work shall be 120 calendar days.

3) Contractor is solely responsible for the complete abandonment of all existing mains unless other is noted.