


CITY OF DEKALB, TEXAS
DOWNTOWN SIDEWALK IMPROVEMENTS

BID PROPOSAL

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
1	1	L.S.	Mobilization including preparatory work and operations, including but not limited to, movement of personnel, equipment, supplies, and incidentals to the project site for the lump sum price of _____ Dollars and _____ Cents/L.S.	\$ _____	\$ _____
2	760	S.Y.	Perform demolition of existing concrete sidewalk and steps to neat lines and following all THG guidelines including all labor, equipment, materials and disposal for the unit price of _____ Dollars and _____ Cents/S.Y.	\$ _____	\$ _____


BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
3	18	S.Y.	Perform removal of existing asphalt pavement to neat lines including all labor, equipment, materials and disposal for the unit price of _____ Dollars and _____ Cents/S.Y.	\$ _____	\$ _____
4	1	L.S.	Perform removal of existing handrails including all labor, equipment, materials and disposal for the lump sum price of _____ Dollars and _____ Cents/L.S.	\$ _____	\$ _____

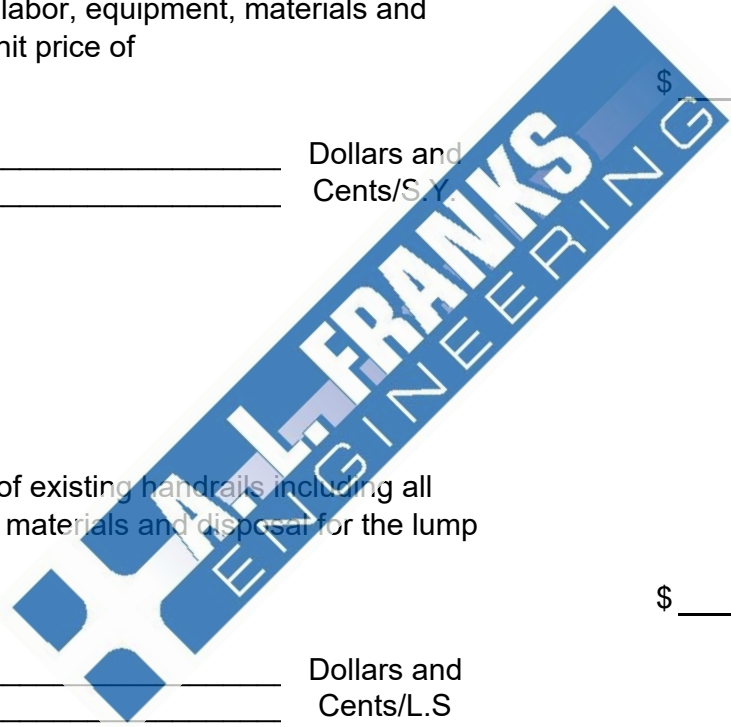


BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
5	3	E.A.	Remove existing water meters including excavation, plugs, disposal and work necessary for the abandonment of water service for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/E.A.		
6	2	E.A.	Remove existing metal benches and coordinate w/city for storage location for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/E.A.		
7	4	E.A.	Remove existing light poles and foundations including excavation, electrical disconnects, disposal and work necessary for the removal of existing light poles	\$ _____	\$ _____
			_____ Dollars and _____ Cents/E.A.		

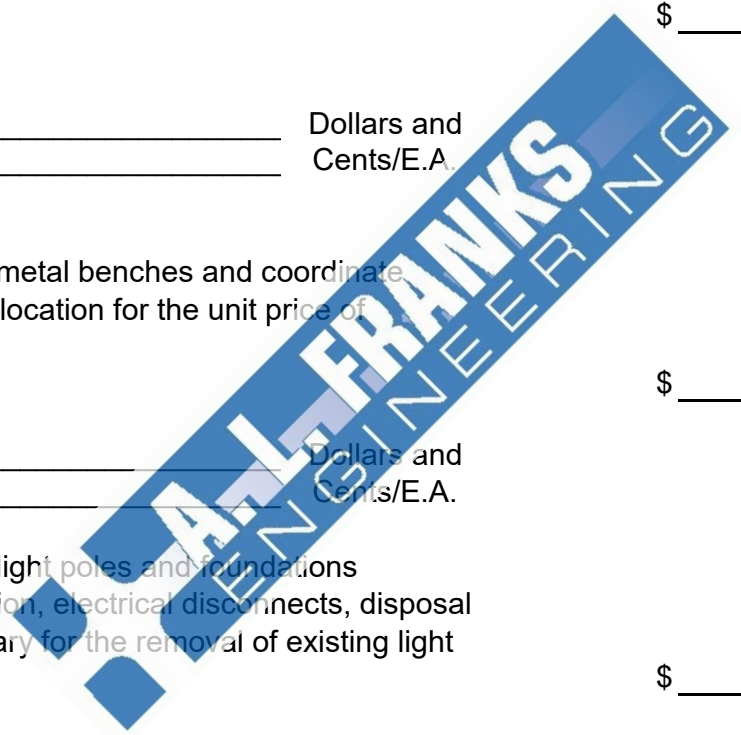


BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
8	2	E.A.	Remove existing riser poles including excavation, disconnects as necessary, disposal and work necessary for the removal of existing riser poles for the unit price of _____ Dollars and _____ Cents/E.A.	\$ _____	\$ _____
9	2	E.A.	Remove existing masonry planter boxes including excavation, demolition, disposal and work necessary for the removal of existing masonry planter boxes for the unit price of _____ Dollars and _____ Cents/E.A.	\$ _____	\$ _____

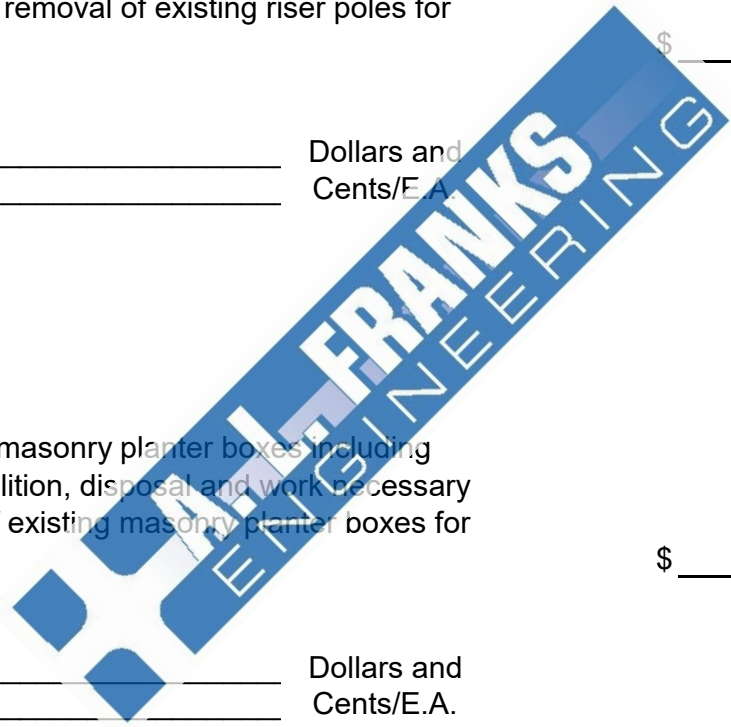

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
10	745	S.Y.	Install concrete sidewalk, including turn down curb, footings, weep holes, grading, subgrade preparation, materials, labor and equipment as necessary per the plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/S.Y.		
11	18	S.Y.	Install concrete pavement including all materials, labor and equipment as necessary per the plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/S.Y.		
12	100	S.Y.	Perform asphalt pavement repair including all materials, labor and equipment as necessary per the plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/S.Y.		

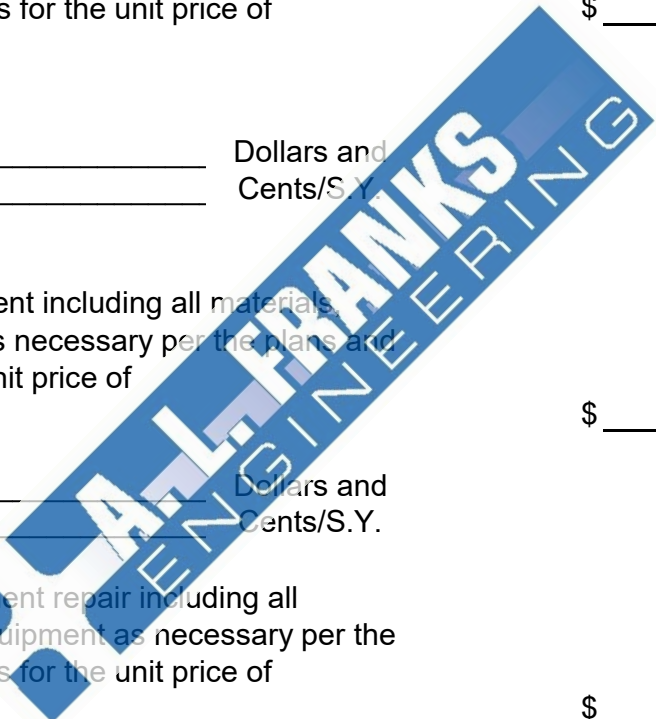


BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
13	40	S.Y.	Perform regrading of existing gravel drive including all materials, labor and equipment as necessary per the plans and specifications for the unit price of _____ Dollars and _____ Cents/S.Y.	\$ _____	\$ _____
14	18	S.Y.	Perform subgrade preparation for concrete pavement including all excavation, materials, labor and equipment as necessary per the plans and specifications for the unit price of _____ Dollars and _____ Cents/S.Y.	\$ _____	\$ _____
15	26	S.Y.	Install ADA ramp w/Type C railing including all materials, labor and equipment as necessary per the plans and specifications for the unit price of _____ Dollars and _____ Cents/S.Y.	\$ _____	\$ _____

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
16	20	S.Y.	Install ADA ramp including all materials, labor and equipment as necessary per the plans and specifications for the unit price of _____ Dollars and _____ Cents/S.Y.	\$ _____	\$ _____
17	38	S.Y.	Install concrete steps including all materials, labor and equipment as necessary per the plans and specifications for the unit price of _____ Dollars and _____ Cents/S.Y.	\$ _____	\$ _____
18	140	L.F.	Install Type C handrail including all materials, labor and equipment as necessary per the plans and specifications for the unit price of _____ Dollars and _____ Cents/L.F.	\$ _____	\$ _____

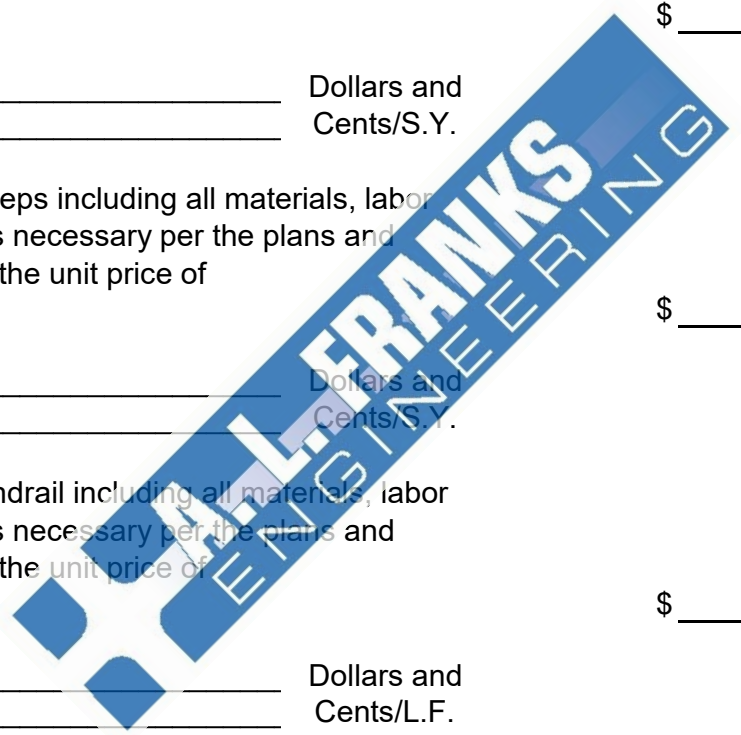


BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
19	6	E.A.	Install Valliant series AVPL2-P201-MVOLT-30K-BK-W/SMA-12-SL4-13S-BK w/top mounted 120V outlet or approved equal including foundation, all materials, labor and equipment as necessary per the plans and specifications for the unit price of _____ Dollars and _____ Cents/E.A.	\$ _____	\$ _____
20	8	E.A.	Install Columbia series bollard light GLBOLED-CA-P30-30K-120V-GL5-ACS-BK-FGE or approved equal including foundation, all materials, labor and equipment as necessary per the plans and specifications for the unit price of _____ Dollars and _____ Cents/E.A.	\$ _____	\$ _____


BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
21	710	L.F.	Install wire and conduit for pole and bollard lighting including, all materials, labor and equipment as necessary per the plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.F.		
22	70	L.F.	Install wire and conduit by bore for pole and bollard lighting including, all materials, labor and equipment as necessary per the plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.F.		

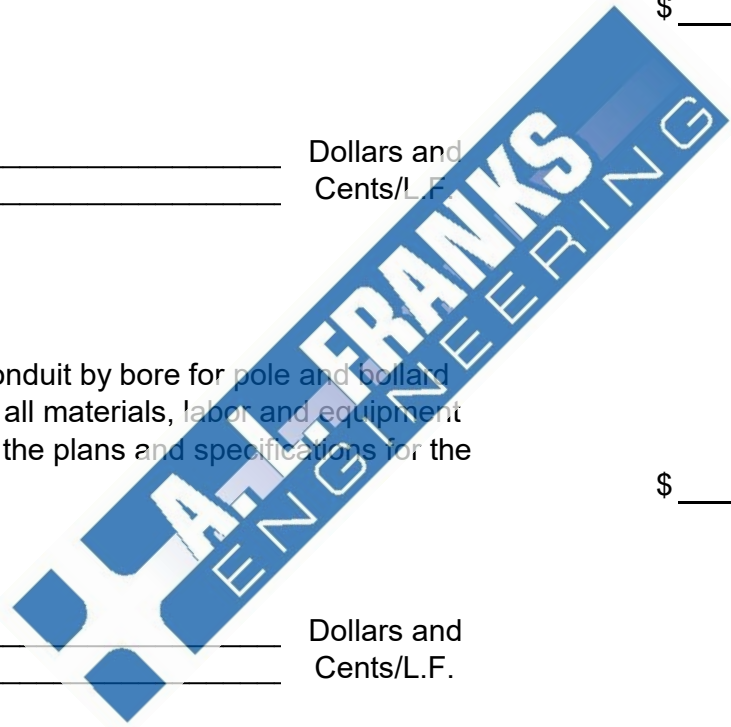


BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
23	2	E.A.	Perform connection to existing electrical panel including, all materials, labor and equipment as necessary per the plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/E.A.		
24	8	E.A.	Install downspout sidewalk drainage including all connections, materials, labor and equipment as necessary per the plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/E.A.		

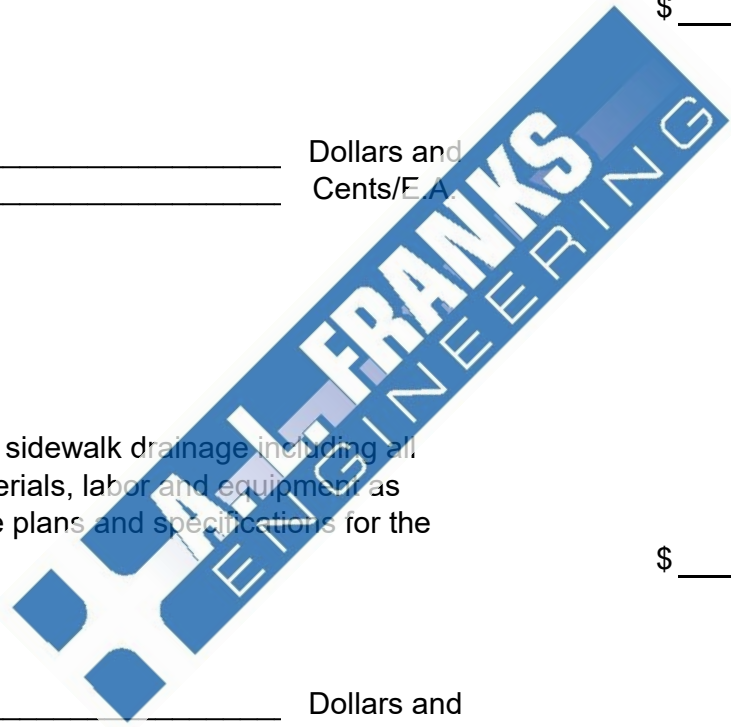

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
25	1	L.S.	Furnish and install traffic control devices, including but not limited to, installing, maintaining, and removing traffic control devices according to the plans and specifications for the unit price of _____ Dollars and _____ Cents/L.S.	\$ _____	\$ _____
26	1	L.S.	Perform Testing of materials, compaction, or other items requested by the Engineer and performed by an approved laboratory per the project plans and specifications for the lump price of _____ Dollars and _____ Cents/LS	\$ _____	\$ _____

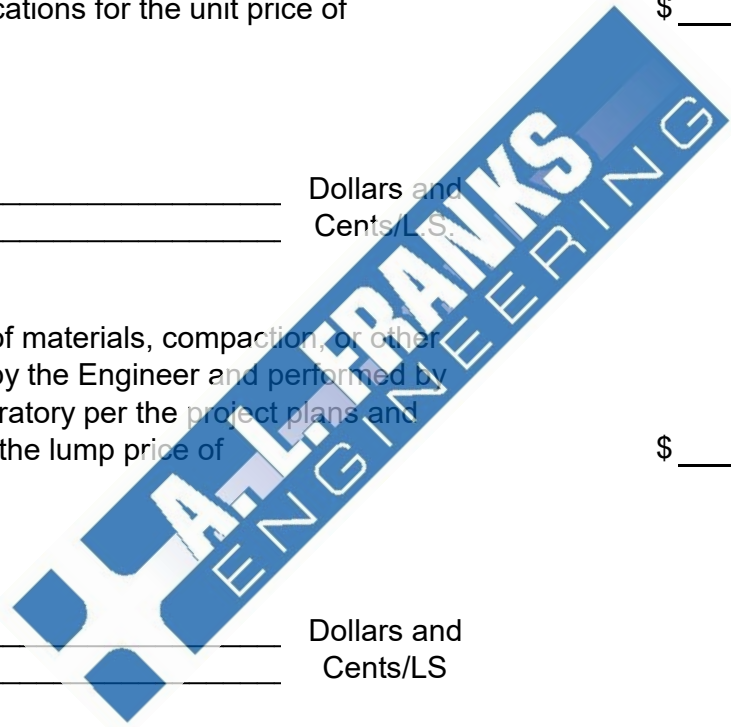

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
27	1	L.S.	Install & maintain erosion control measures as necessary to prevent the transportation of sediment offsite including but not limited to street sweeping, seeding, and other controls as necessary to limit erosion throughout the project and establish a minimum of 70% permanent vegetation for the lump sum price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.S.	_____	_____
TOTAL OF ITEMS 1-27				\$ _____	

NOTES: Contractor shall submit bids and hold price for a period of no more than 60 days from the bid opening. All work shall be done in accordance with TCEQ requirements and permits as provided in the specifications.

Items that are subsidiary to performing the work shall include all labor, equipment, and materials shall be supplied by the contractor. Existing utilities and improvements shall be protected during construction and contractor shall coordinate with City of Dekalb Utility Department for existing utilities encountered. Protection measures shall be approved by the engineer prior to construction.

Haul routes approved designated by the city shall be restored to original conditions upon completion of the work. This area is not included in seeding / revegetation and shall be considered subsidiary to the work.

All work performed shall be in accordance with Texas Historical Commission Streetscape Guidelines for Historic Commercial Districts as provided in the plans and specifications