

**SOUTH PIKE COUNTY WATER  
UTILITY RELOCATION ARDOT JOB # 030598**

**BID PROPOSAL**


ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
1	255	L.F.	Furnish and Install material, labor and equipment for 4" C-200 PVC Water Main, and Fittings including trench excavation, laying, bedding, blocking, and backfilling per plans and specifications for the unit price of  _____ Dollars and _____ Cents/L.F.	\$ _____	\$ _____
2	1	EA	Provide and Install Type 2 Creek Crossing for 4" Water Main per plans and specifications for the unit price of  _____ Dollars and _____ Cents/EA		

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
3	2	EA	Furnish and Install 4"x4" M.J. Tapping Sleeve and 4" gate valve including valve box and blocking per plans and specifications for the unit price of	\$ _____  _____ Dollars and Cents/EA	\$ _____
4	1	L.S.	Cut, cap, and abandon all existing water mains as shown per the plans and specifications for the lump sum price of	\$ _____  _____ Dollars and Cents/LS	\$ _____

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
5	1	L.S.	Furnish all labor and install all equipment for testing and sterilization of treated mains and appurtenances per plans and specifications for the lump sum price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.S.		
6	1	L.S.	Trench Safety per plans and specifications for the lump sum price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.S.		

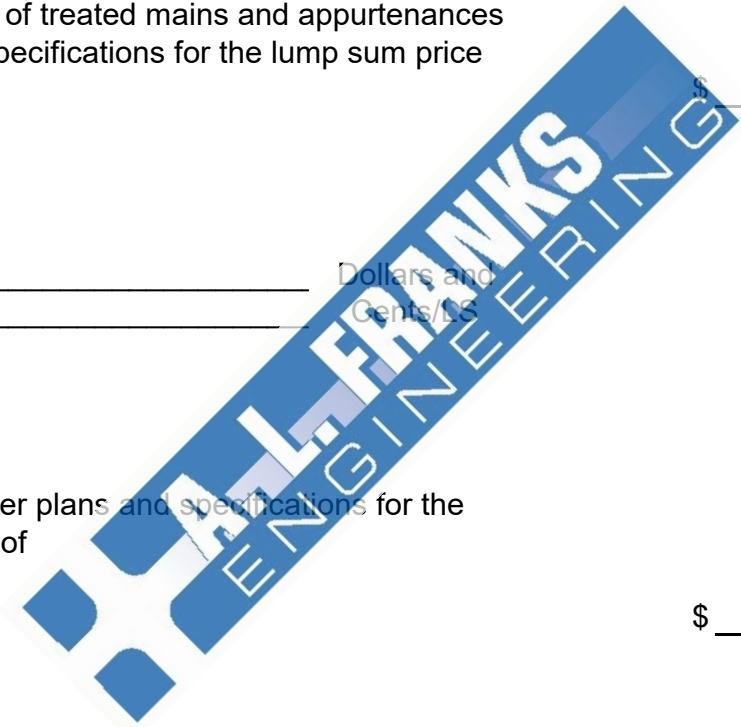

BID PROPOSAL CONTINUED

TOTAL OF ALL ITEMS

\$

---

---

**NOTES**

- 1) Miscellaneous items, directed work, connections, etc., not specifically listed but required to complete the proposed improvements to a complete and operational system shall be included in the Bid under the most appropriate Bid Item.
- 2) Time required to complete base bid work shall be 60 calendar days.
- 3) Contractor is solely responsible for the complete abandonment of all existing mains unless otherwise noted.

