

## ADDENDUM NO. 1

TO: ALL PLAN HOLDERS

RE: City of East Camden, Arkansas  
Wastewater Improvements

**Bid Date: March 26, 2025**


ADDENDUM DATE: March 24, 2025

The Plans, Specifications and Contract Documents for the above referenced project are hereby modified as follows:


- 1. Bid Proposal Revision: Remove and Replace with the attached Revised Bid Proposal.**

ADDENDUM NO. 1 ISSUED BY:

A.L. FRANKS ENGINEERING



Anthony (Andy) Franks, P.E.  
Project Engineer  
A.L. Franks Engineering




**CITY OF EAST CAMDEN, ARKANSAS**

**REDBUD STREET WASTEWATER COLLECTION SYSTEM IMPROVEMENTS**

**BID PROPOSAL**

<b>ITEM</b>	<b>QTY</b>	<b>UNIT</b>	<b>DESCRIPTION</b>	<b>UNIT PRICE</b>	<b>TOTAL PRICE</b>
1	1263	L.F.	Furnish & Install 15" PVC Sanitary Sewer Main (SDR 26)(6-8 ft depth) to the grade shown in the plans and specifications including all materials, bedding, backfill, equipment and labor for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.F		
2	550	L.F.	Furnish & Install 15" PVC Sanitary Sewer Main (SDR 26)(8-10 ft depth) to the grade shown in the plans and specifications including all materials, bedding, backfill, equipment and labor for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.F		

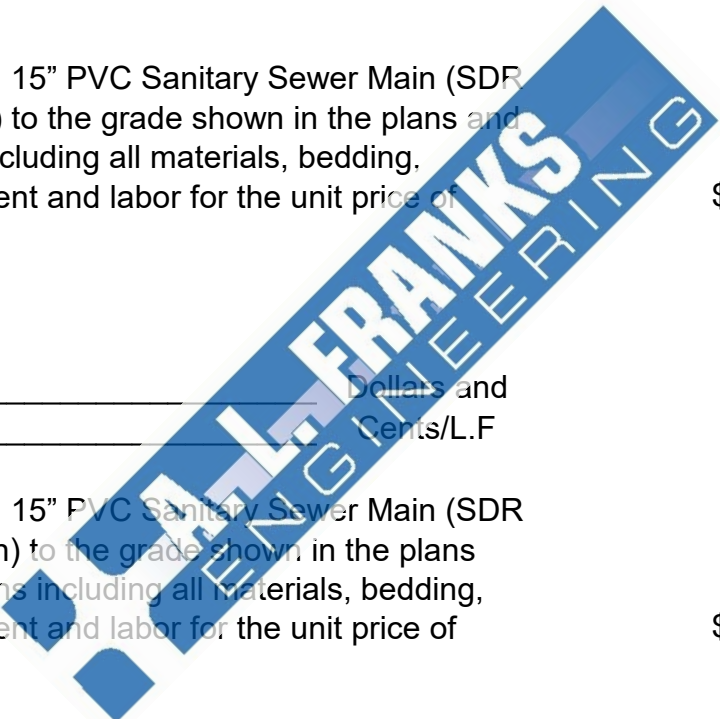

BID PROPOSAL CONTINUED


ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
3	100	L.F.	Furnish & Install 15" PVC Sanitary Sewer Main (SDR 26)(10-12ft depth) to the grade shown in the plans and specifications including all materials, bedding, backfill, equipment and labor for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.F		
4	855	L.F	Furnish & Install 12" PVC Sanitary Sewer Main (SDR 26) (6-8 ft depth) to the grade shown in the plans and specifications including all materials, bedding, backfill, equipment and labor for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.F		

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
5	13	EA	Furnish & Install 4-ft diameter precast concrete manholes to the varying depths shown on the plans including all excavation, bedding, gaskets, and incidentals necessary for the installation of the manholes per plan and specifications for the unit price of  _____ Dollars and _____ Cents/EA	\$ _____	\$ _____
6	1	L.S.	Furnish & Install Trench Protection associated with excavation for the sewer main and manhole installation. Contractor shall provide and implements safety features in accordance with OSHA Standards for the lump sum price of  _____ Dollars and _____ Cents/L.S.	\$ _____	\$ _____


BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
7	17	EA	Tie-in New Manhole to Existing main per plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/EA		
8	3	EA	Tie-In New Main to existing manhole per plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/EA		

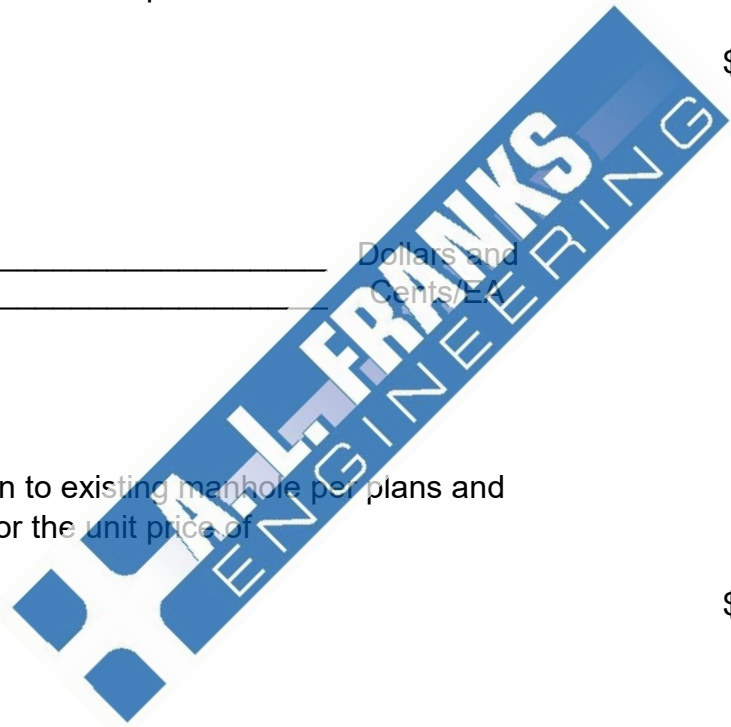


BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
9	24	EA	Provide and Install 4" sewer service connections to new sewer main including up to 20-ft of service line per plans and specifications for the unit price of  _____ Dollars and _____ Cents/EA	\$ _____	\$ _____
10	13	EA	Plug and abandon existing manholes per plans and specifications for the lump sum price of  _____ Dollars and _____ Cents/EA	\$ _____	\$ _____

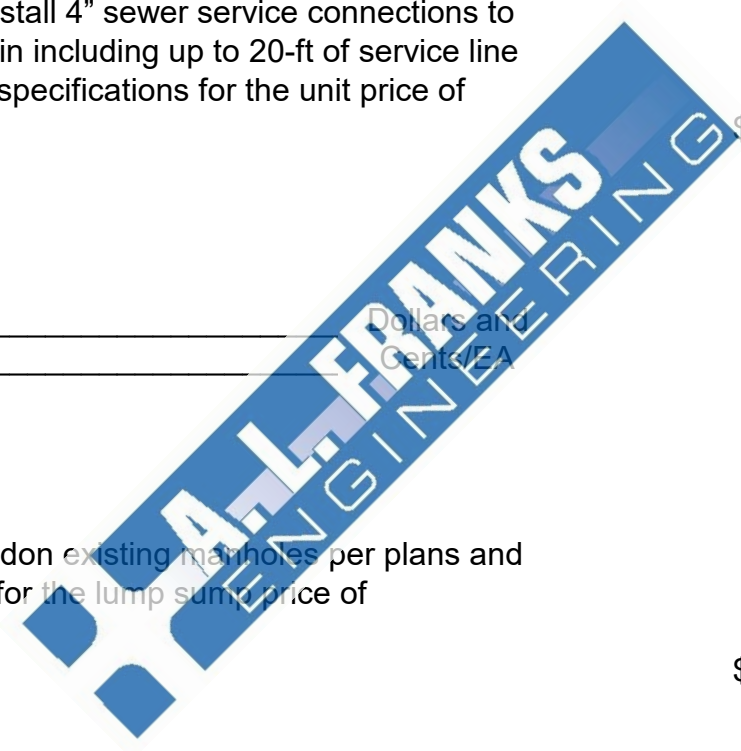

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
11	1	L.S.	Provide stabilization of disturbed soil and establish permanent vegetation in accordance with Stormwater Pollution Prevention Plan for the unit price of	\$ _____	\$ _____
_____ Dollars and _____ Cents/L.S.					
12	105	L.F.	Open Cut and Repair Asphalt Street/Drive per plans and specifications for the unit price of	\$ _____	\$ _____
_____ Dollars and _____ Cents/L.F.					

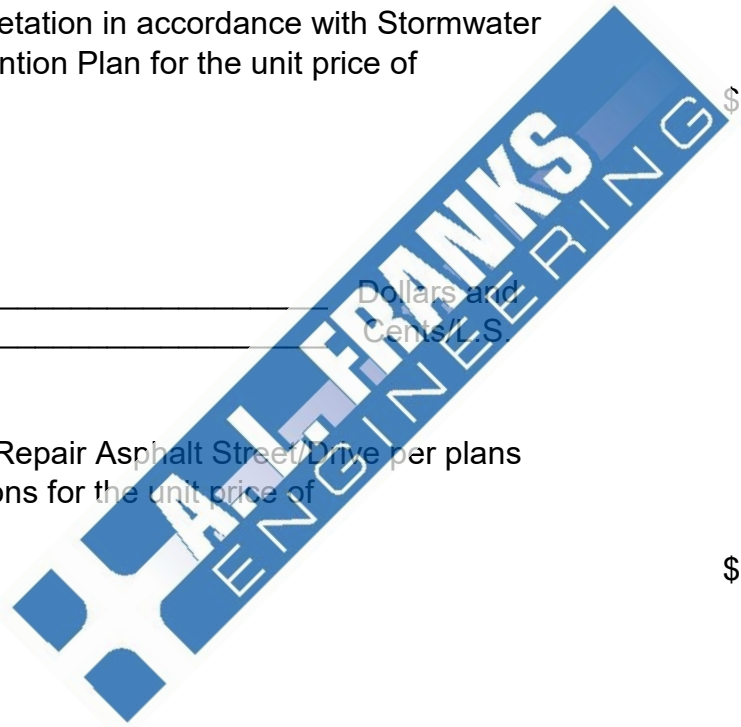

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
13	195	L.F.	Open Cut and Repair Concrete Drive per plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.F.		
				=====	=====
			<b>TOTAL BASE BID</b>	\$ _____	
1	470	L.F.	<b>DEDUCTIVE ALTERNATE #1 (PLAN SHEET 7)</b> <b>DEDUCT ITEM #4-</b> Furnish & Install 12" PVC Sanitary Sewer Main (SDR 26) (6-8 ft depth) to the grade shown in the plans and specifications including all materials, bedding, backfill, equipment and labor for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.F.		



BID PROPOSAL CONTINUED


**DEDUCTIVE ALTERNATE #1 (PLAN SHEET 7)  
DESCRIPTION**

<b>ITEM</b>	<b>QTY</b>	<b>UNIT</b>	<b>DESCRIPTION</b>	<b>UNIT PRICE</b>	<b>TOTAL PRICE</b>
2	2	EA	<b>DEDUCT ITEM #5</b> -Furnish & Install 4-ft diameter precast concrete manholes to the varying depth shown on the plans including all excavation, bedding, gaskets, and incidentals necessary for the installation of the manholes per plan and specifications for the unit price of  _____ _____ Dollars and Cents/EA	\$ _____	\$ _____
3	6	EA	<b>DEDUCT ITEM #9</b> -Provide and install 4" sewer service connections to new sewer main including up to 20-ft of service line per plans and specifications for the unit price of  _____ _____ Dollars and Cents/EA	\$ _____	\$ _____

BID PROPOSAL CONTINUED

**DEDUCTIVE ALTERNATE #1 (PLAN SHEET 7)  
DESCRIPTION**

<b>ITEM</b>	<b>QTY</b>	<b>UNIT</b>	<b>DESCRIPTION</b>	<b>UNIT PRICE</b>	<b>TOTAL PRICE</b>
4	4	EA	<b>DEDUCT ITEM #7</b> -Tie-in New Manhole to Existing Main per plans and specifications for the unit price of  _____ Dollars and _____ Cents/EA	\$ _____	\$ _____
5	2	EA	<b>DEDUCT ITEM #10</b> -Plug and abandon existing manholes per plans and specifications for the lump sump price of  _____ Dollars and _____ Cents/EA	\$ _____	\$ _____

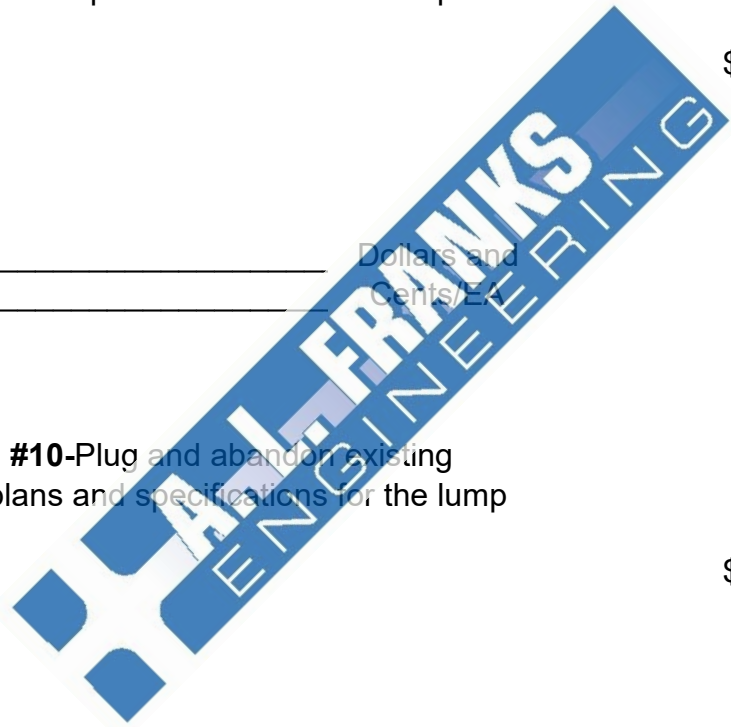

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
6	30	L.F.	<b>DEDUCT ITEM #12</b> -Open Cut and Repair Asphalt Street/Drive per plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.F.		
7	60	L.F.	<b>DEDUCT ITEM # 13</b> -Open Cut and Repair Concrete Drive per plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.F.		
<b>TOTAL DEDUCTIVE ALTERNATE #1</b>				\$ _____	_____


BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
			<b>DEDUCTIVE ALTERNATE #2 (PLAN SHEET 6 &amp; 7)</b>		
1	385	L.F.	<b>DEDUCT ITEM #4-</b> Furnish & Install 12" PVC Sanitary Sewer Main (SDR 26) (6-8 ft depth) to the grade shown in the plans and specifications including all materials, bedding, backfill, equipment and labor for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.F.		
2	3	EA	<b>DEDUCT ITEM #5-</b> Furnish & Install 4-ft diameter precast concrete manholes to the varying depth shown on the plans including all excavation, bedding, gaskets, and incidentals necessary for the installation of the manholes per plan and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/EA		

BID PROPOSAL CONTINUED

**DEDUCTIVE ALTERNATE #2 (PLAN SHEET 6 & 7)**


ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
3	6	EA	<b>DEDUCT ITEM #9</b> -Provide and Install 4" sewer service connections to new sewer main including up to 20-ft of service line per plans and specifications for the unit price of  _____ Dollars and _____ Cents/EA	\$ _____	\$ _____
4	3	EA	<b>DEDUCT ITEM #7</b> -Tie-in New Manhole to Existing with main line construction per plans and specifications for the unit price of  _____ Dollars and _____ Cents/EA	\$ _____	\$ _____

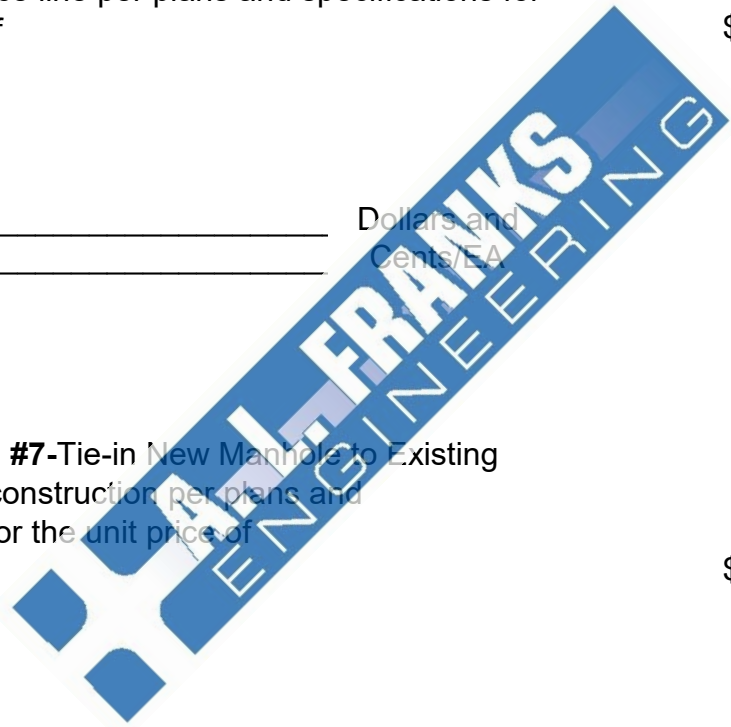

BID PROPOSAL CONTINUED

**DEDUCTIVE ALTERNATE #2 (PLAN SHEET 6 & 7)**

ITEM	QTY	UNIT	DESCRIPTION	UNIT PRICE	TOTAL PRICE
5	3	EA	<b>DEDUCT ITEM #10</b> -Plug and abandon existing manholes per plans and specifications for the lump sump price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/EA		
6	35	L.F.	<b>DEDUCT ITEM # 13</b> -Open Cut and Repair Concrete Drive per plans and specifications for the unit price of	\$ _____	\$ _____
			_____ Dollars and _____ Cents/L.F.		
<b>TOTAL DEDUCTIVE ALTERNATE #2</b>				\$ _____	_____

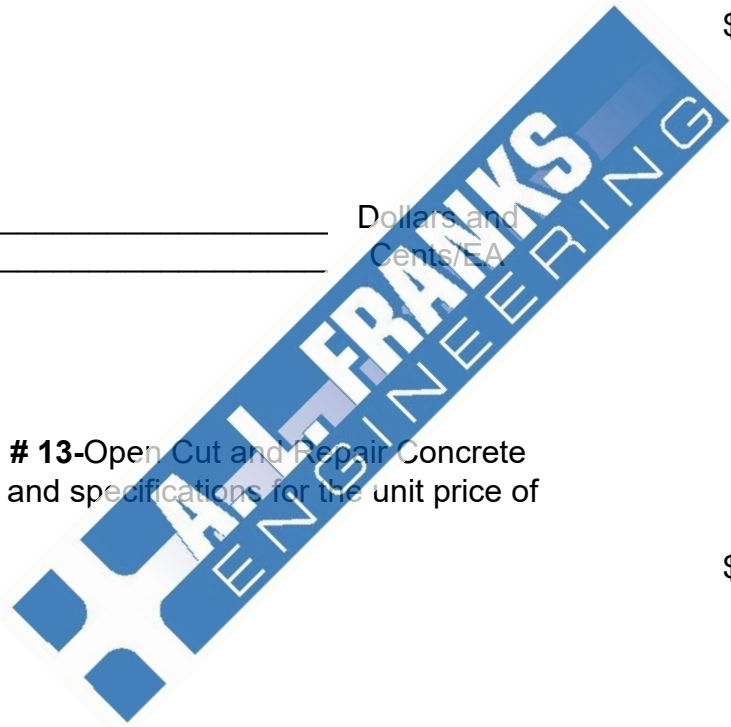

BID PROPOSAL CONTINUED

TOTAL BASE BID \$ \_\_\_\_\_

TOTAL BASE LESS DEDUCTIVE #1 \$ \_\_\_\_\_

TOTAL BASE LESS DEDUCTIVE #1 & #2 \$ \_\_\_\_\_

**NOTES:** Miscellaneous items such as removal and reinstallation of fences, gravel drive repair, bypass pumping, testing of the new sewer main, or other items subsidiary to the main installation shall be included in the Bid under the most appropriate Bid Item.

