


McCURTAIN RURAL WATER DISTRICT NO.8

Water Treatment Plant / Sludge Removal and Land


BID PROPOSAL

<u>ITEM</u>	<u>QTY/UNIT</u>	<u>DESCRIPTION</u>			<u>TOTAL PRICE</u>
1.	1 L.S.	Remove, dewater, and land apply water treatment plant residuals estimated at 168 dry tons (dewatered condition) from Pond A, to include all labor, equipment, staging, hauling, application, in accordance with the permit, plan and specification requirements for the Lump Sum Price of _____ Dollars and _____ Cents/L.S.	\$ _____		\$ _____
2.	1 L.S.	Remove, dewater, and land apply water treatment plant residuals estimated at _____ dry tons (dewatered condition) from Pond B, to include all labor, equipment, staging, hauling, application, in accordance with the permit, plan and specification requirements for the Lump Sum Price of _____ Dollars and _____ Cents/L.S.	\$ _____		\$ _____

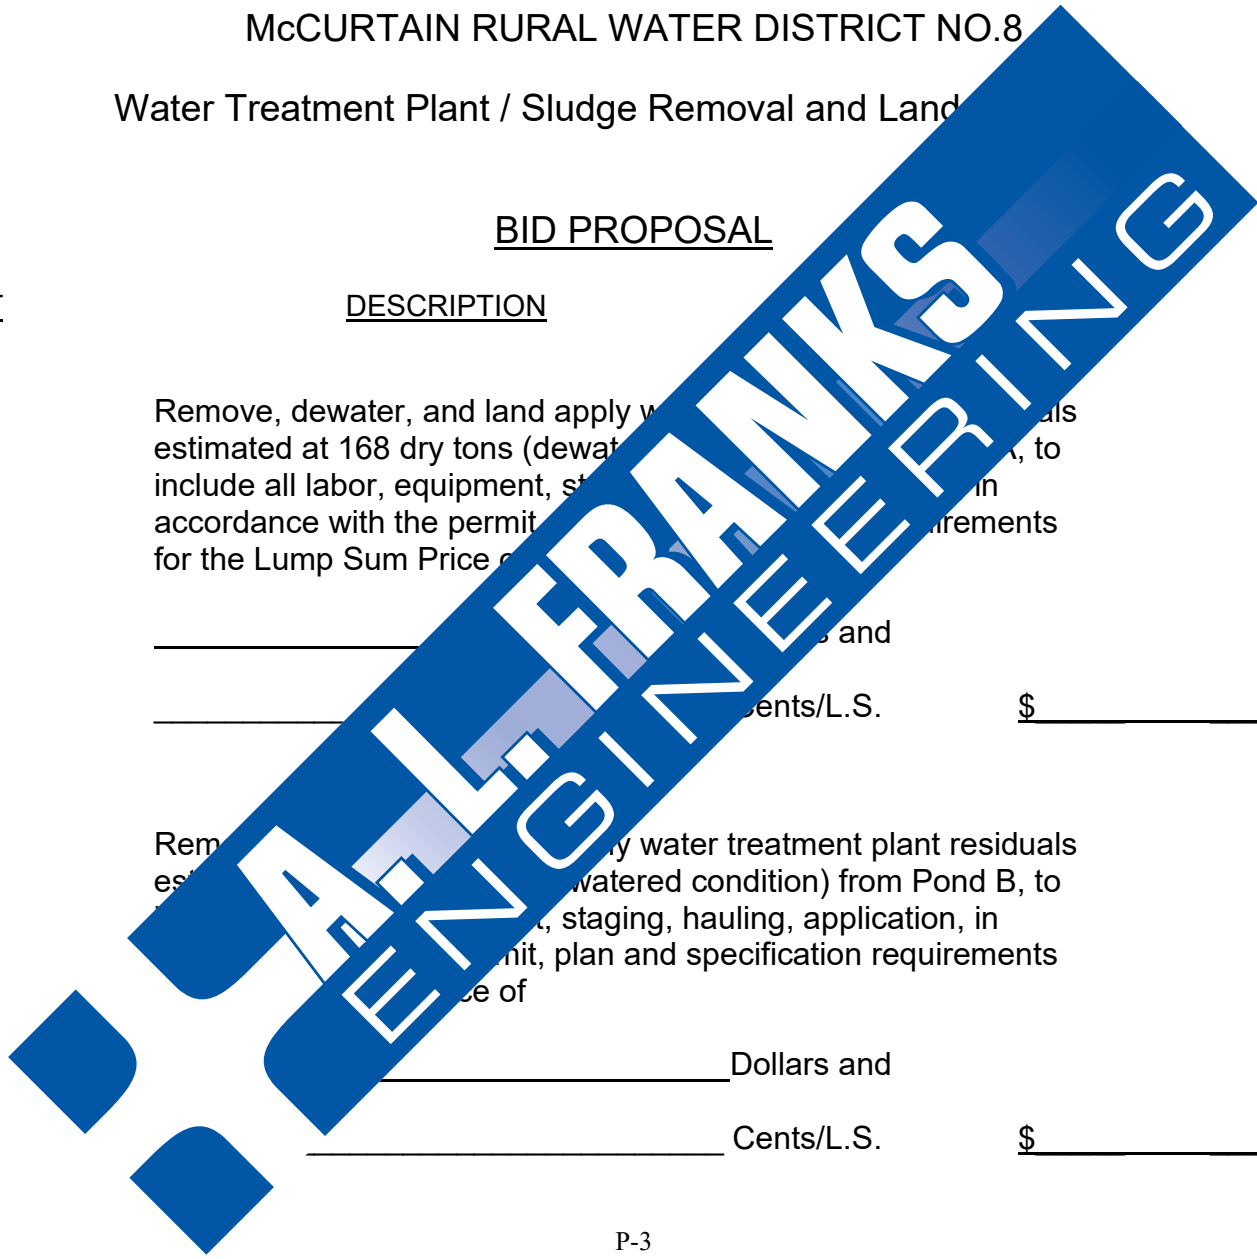

BID PROPOSAL
(Cont'd)

<u>ITEM</u>	<u>QTY/UNIT</u>	<u>DESCRIPTION</u>	<u>PRICE</u>
3.	1 L.S.	Provide one representative sample of analytical of Biosolids following dewatering to the owner by the Land Application Permit (minimum for the lump sum price of _____	\$ _____
			\$ _____
			\$ _____

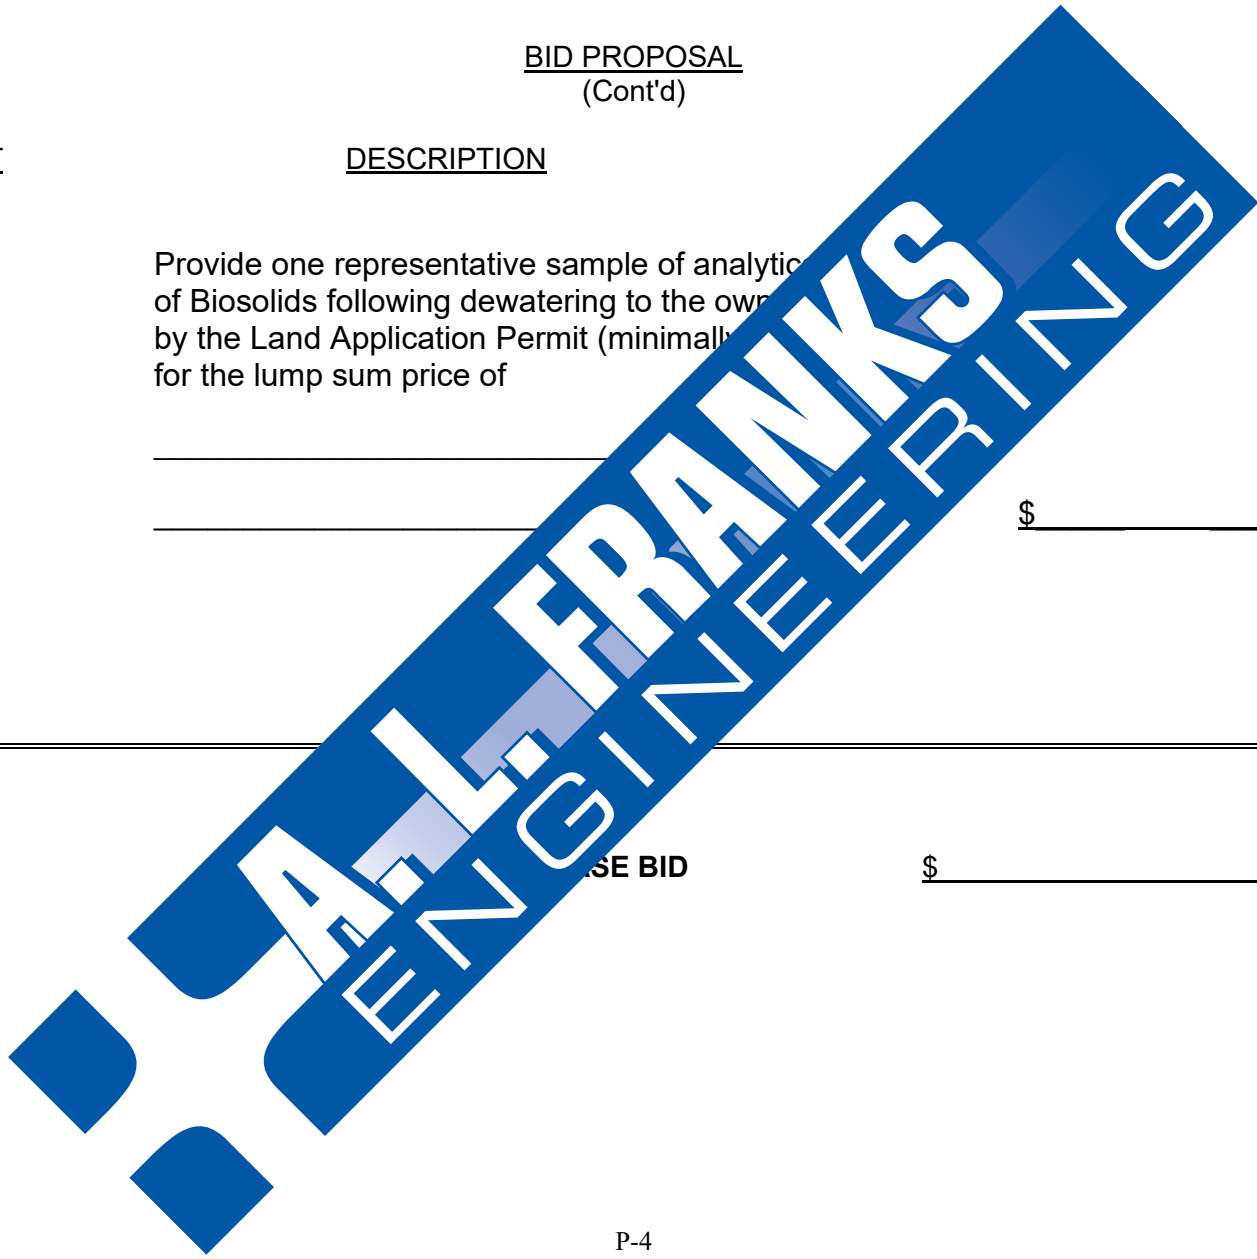

NOTES:

- 1) Contractor shall provide written Statement of Qualifications demonstrating experience in the application of biosolids, dewatering, and land application.
- 2) Any damage that occurs to the city property, disposal property, or other areas affected by the project shall be repaired by the contractor to an equal or better condition at the contractor's expense.
- 3) A staging area shall be included to perform dewatering, and loading of biosolids. The staging area shall include site grading, liner installation, compaction, etc. The staging area may remain onsite following the project but shall be returned to the owner to mow, etc.
- 4) Vector Reduction shall be considered to be attained by incorporating biosolids into the soil within 48 hours after application.
- 5) Time required to complete work shall be 90 calendar days.
- 6) Contractor shall submit a written report to the City upon completion of the project including all tests reports, total amount of biosolids hauled, etc.

Respectfully submitted:

_____ Date

_____ (if applicable)

SEAL - (if BID is by a

