


McCurtain Co. RWD #8

Mt. Fork Resort Phase II Development – Water Main Installation


BID PROPOSAL

<u>ITEM</u>	<u>QTY/UNIT</u>	<u>DESCRIPTION</u>	<u>TOTAL PRICE</u>
1.	13,400 L.F.	Furnish and Install 4" Water Main (HDPE DR-11) Pipe with fittings, including trench excavation, laying bedding, blocking and backfilling per plans and specifications for the unit price of _____	\$ _____
2.	1,300 L.F.	Furnish and Install 4" Water Main (HDPE DR-11) Pipe by Directional BORE, including trench excavation, bedding and backfilling per plans and specifications for the unit price of _____ Dollars and _____ Cents/L.F.	\$ _____
3.	200 L.F.	Furnish and Install 4" Water Main (HDPE DR-11) Pipe by Directional BORE, including trench excavation, bedding and backfilling per plans and specifications for the unit price of _____ Dollars and _____ Cents/L.F.	\$ _____

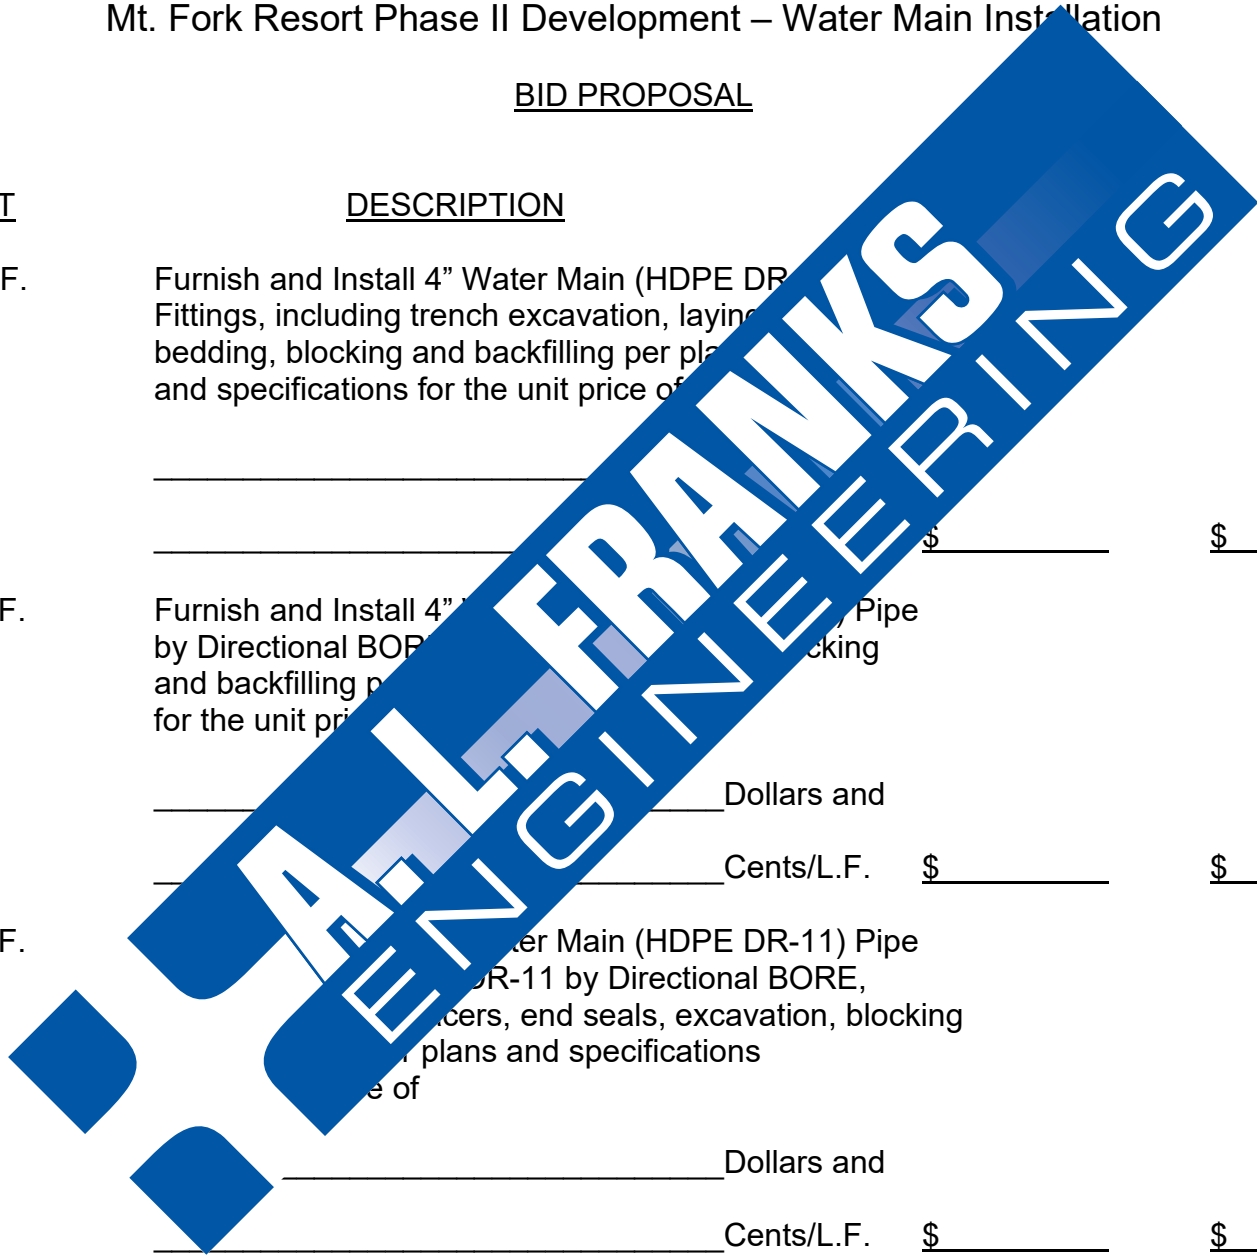


BID PROPOSAL
(Cont'd)

<u>ITEM</u>	<u>QTY/UNIT</u>	<u>DESCRIPTION</u>	<u>TOTAL PRICE</u>
4.	2 EA.	Furnish and Install Automatic 2" Flush Hydrant Assembly, including all fittings, equipment, and materials per plans and specifications for the unit price of _____ Dollars and _____ Cents/EA.	\$ _____ \$ _____
5.	6 EA.	Furnish and Install 4" Manhole Gate Valves including valve box and specifications per plans and specifications for the unit price of _____ Dollars and _____ Cents/EA.	\$ _____ \$ _____
6.	1 EA.	Furnish and Install 4" Manhole Gate Valves including valve box and specifications per plans and specifications for the unit price of _____ Dollars and _____ Cents/EA.	\$ _____ \$ _____

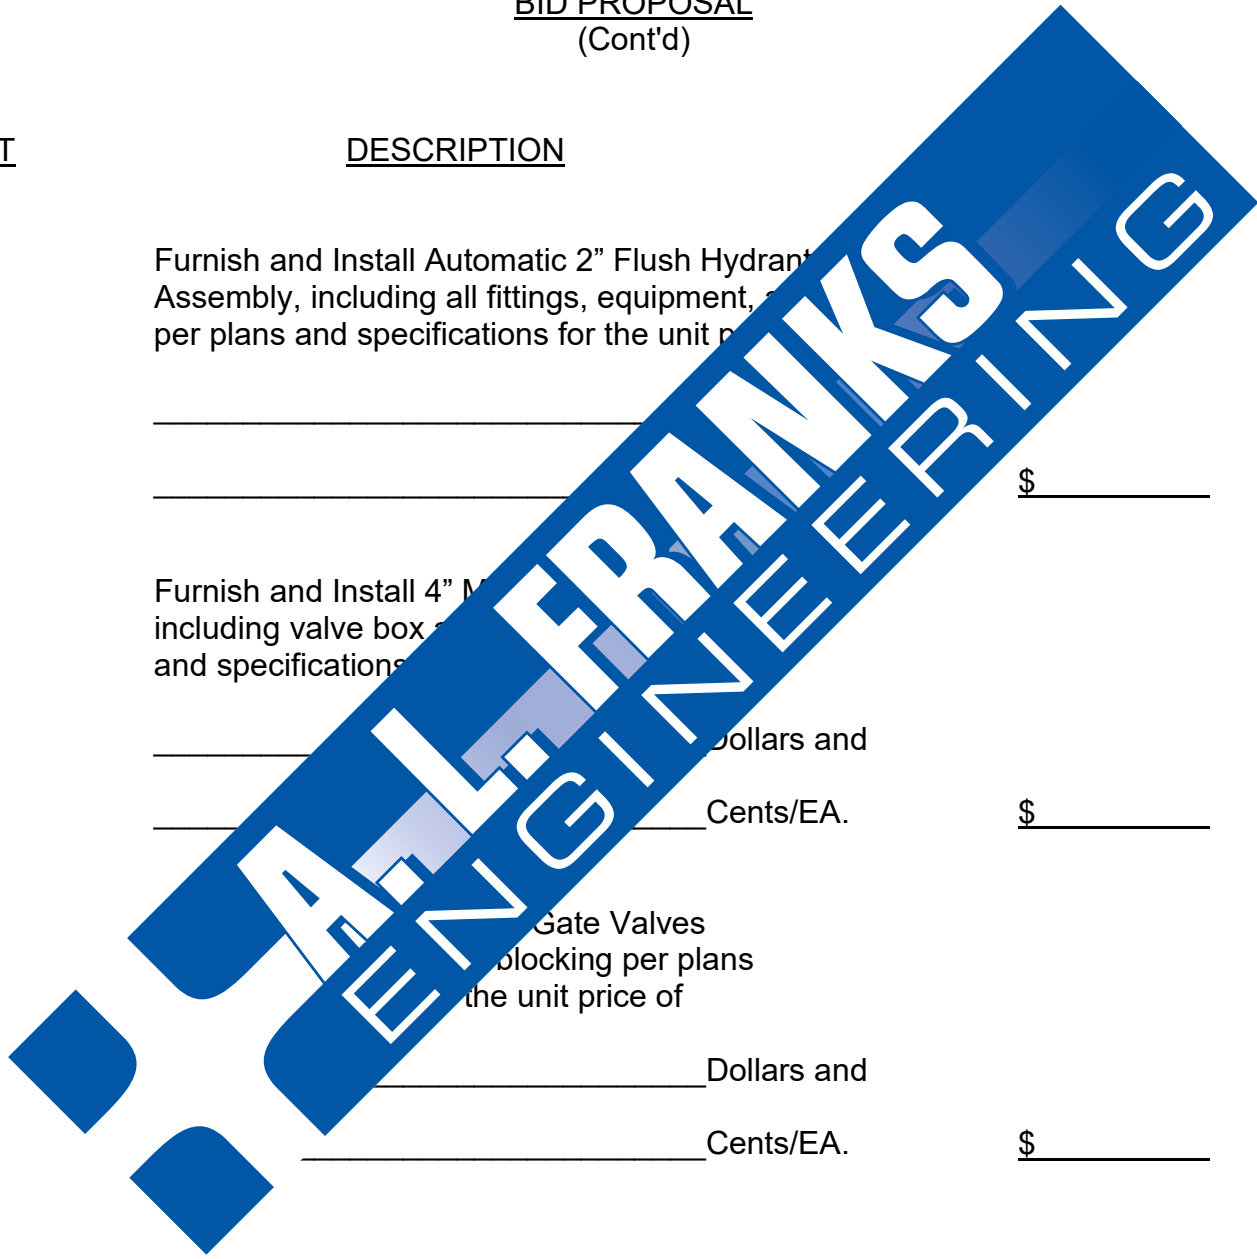


BID PROPOSAL
(Cont'd)

<u>ITEM</u>	<u>QTY/UNIT</u>	<u>DESCRIPTION</u>	<u>TOTAL PRICE</u>
7.	1 EA.	Connection to existing 4" water main per plans and specifications for the unit price of _____ Dollars and _____ Cents/L.S.	\$ _____
8.	1 L.S.	Furnish all labor and install including sample taps for _____ of treated mains and _____ and specifications for _____ _____ Dollars and _____ Cents/L.S.	\$ <u>XXXXXXXX</u>

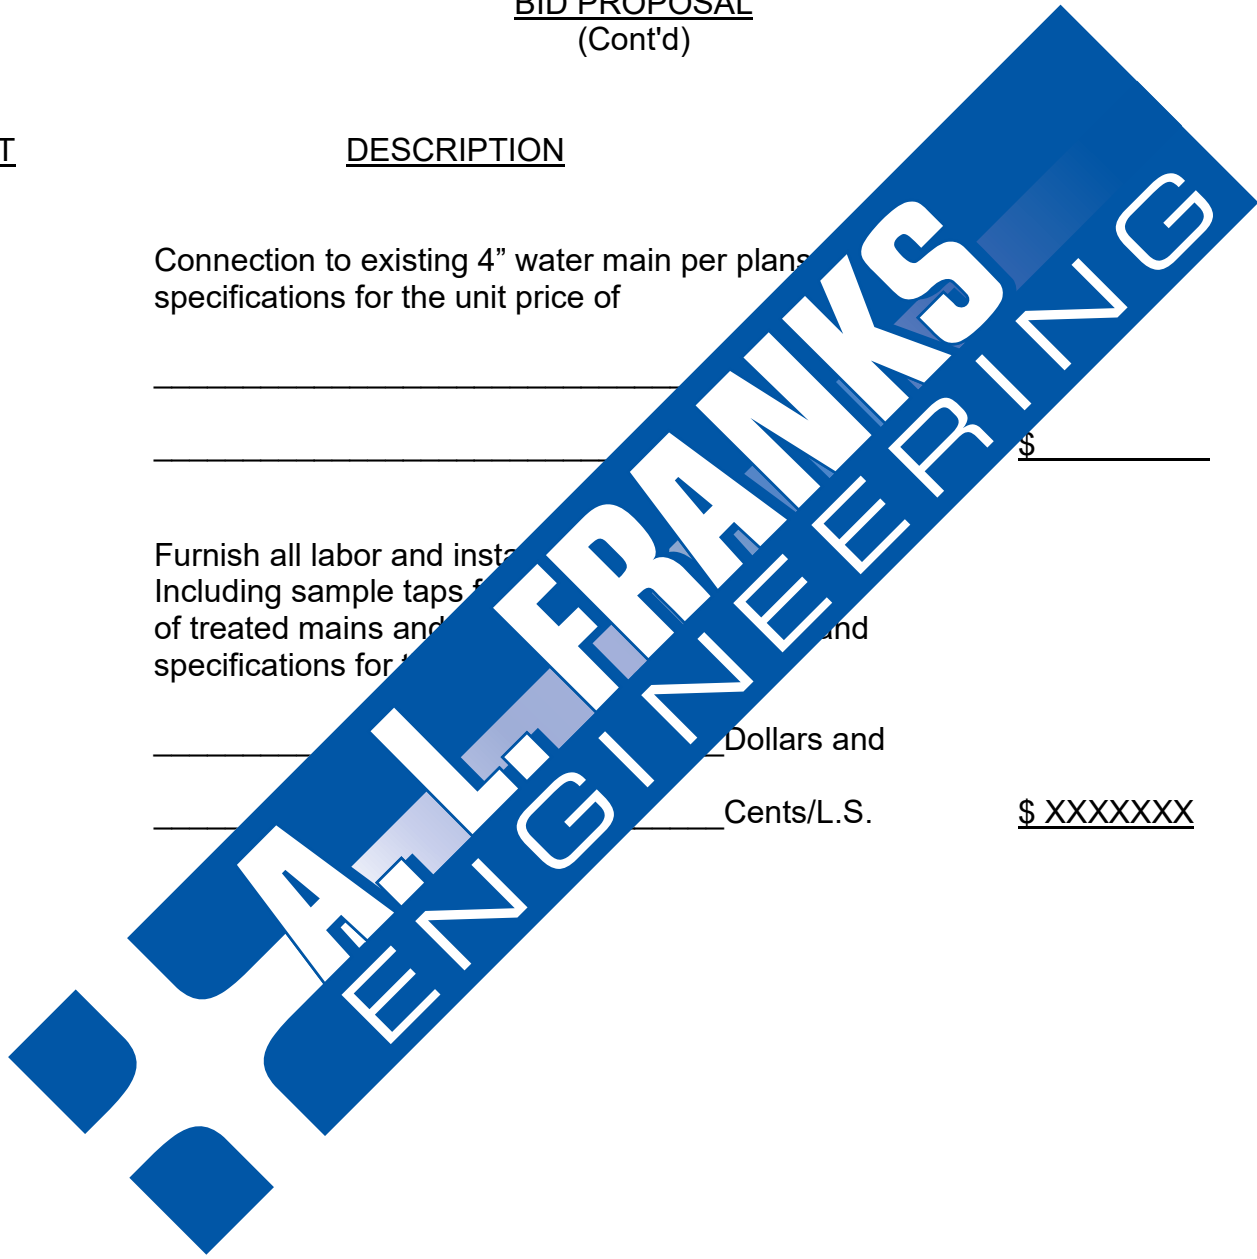

BID PROPOSAL
(Cont'd)

<u>ITEM</u>	<u>QTY/UNIT</u>	<u>DESCRIPTION</u>	<u>UNIT PRICE</u>	<u>TOTAL PRICE</u>
9.	1 L.S.	Trench Safety per Technical Specifications for the lump sum price of _____ Dollars _____ Cents/XXX	_____ XXXX	\$ _____
10.	1 L.S.	Perform Seeding (Bermuda/rye m Permanent vegetation as defin & Specifications for the Lump _____ and _____ Cents/L.S.	\$ XXXXXXXX	\$ _____
11.	200 L.F.	Provide and _____ ions directed By the en _____ (upon stabilization) as defin _____ for the Unit _____ _____ Dollars and _____ Cents/L.F.	\$ _____	\$ _____

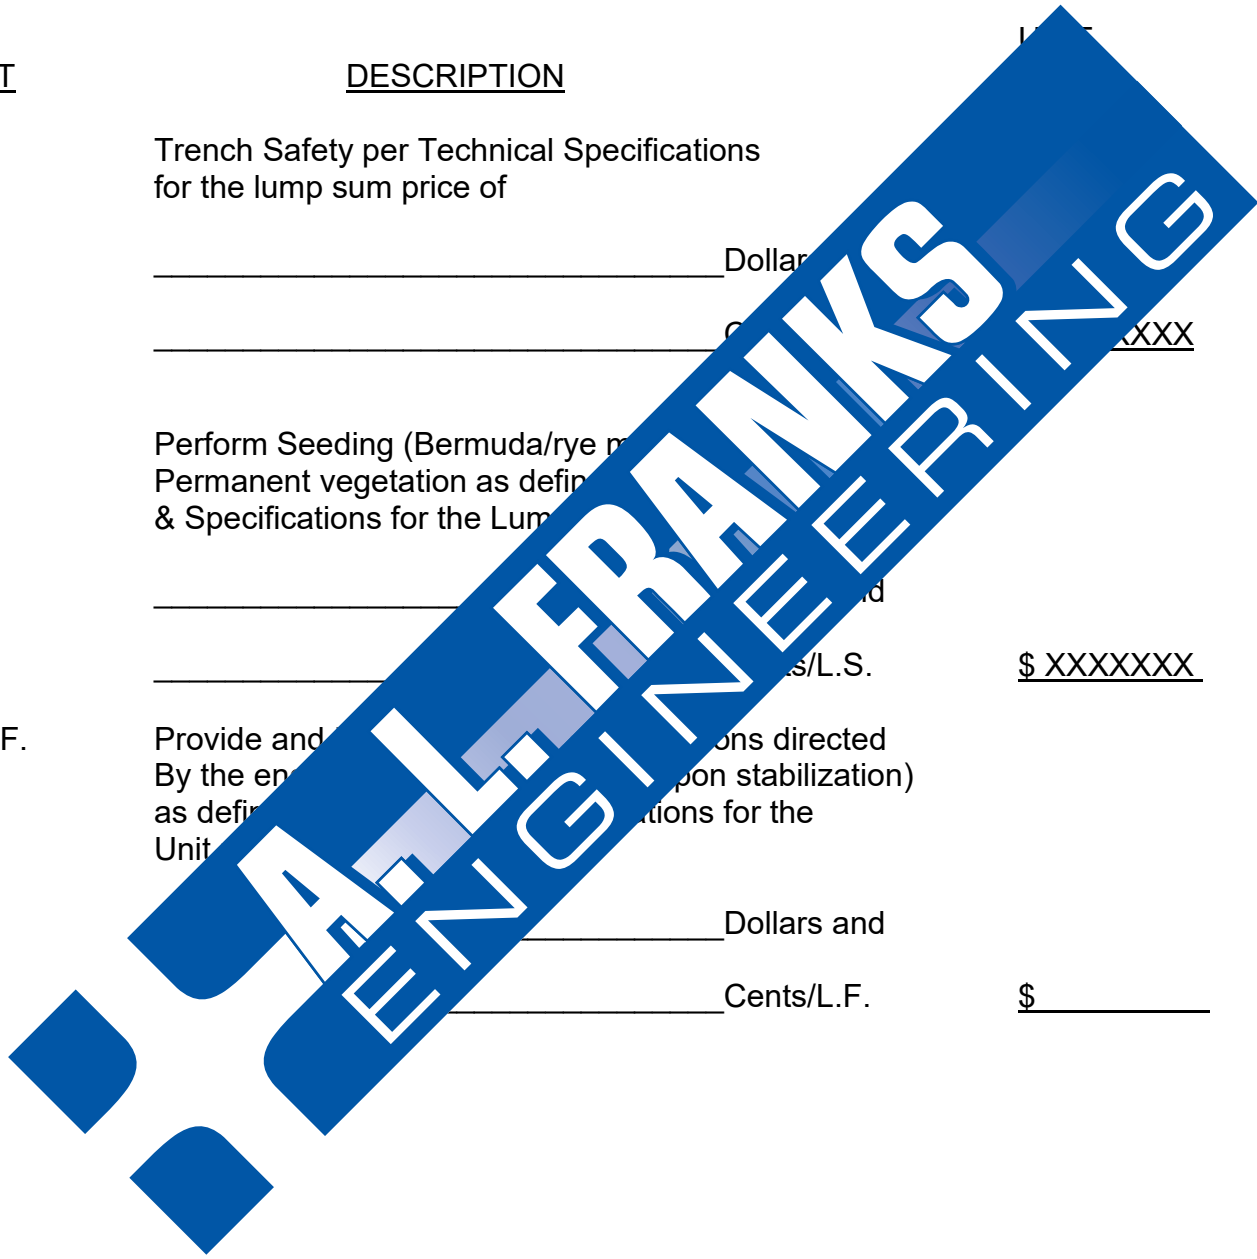

12. 10 EA. Provide and Install Water Line Markers upon Completed installation as defined in the Plans and Specifications for the unit price of

_____ Dollars and
 _____ Cents/ \$ _____

13. 200 C.Y. Furnish and Install granular bedding material for The water main installation as required by the Plans and specifications for the unit price of

_____ Dollars and
 _____ Cents/ \$ _____

_____ BID \$ _____

- Items not specifically called out in the specifications but which are necessary for the proper installation of the water main shall include: tracer wire, testing of tracer wire, working around other utilities such as underground gas, electric, and sewer lines, watering, restoring ditches to grade to drain, reseeding, etc. The bidder shall review the site prior to bid to become familiar with conditions, etc.

