

## ADDENDUM NO. 2

TO: ALL PLAN HOLDERS

RE: 2026 Street Improvements – City of Stuttgart, Arkansas

ADDENDUM DATE: August 12, 2026

The Plans, Specifications and Contract Documents for the above referenced project are hereby modified as follows:

1. Typical Detail Sheet 19 to be replaced with attached revision for Open Cut Detail.
  - a. Trenching and backfill considered subsidiary to culvert installation.

ADDENDUM NO.1 ISSUED BY:

A.L. FRANKS ENGINEERING






8-12-26

Caleb Mudford, P.E.  
Project Manager


GENERAL NOTES

1. ALL LAND MONUMENTS LOCATED WITHIN THE CONSTRUCTION AREA SHALL BE PROTECTED IN ACCORDANCE WITH THE STANDARD SPECIFICATIONS.
2. ALL TREES THAT DO NOT DIRECTLY INTERFERE WITH THE PROPOSED CONSTRUCTION SHALL BE SPARED AS DIRECTED BY THE ENGINEER. CARE AND DISCRETION SHALL BE USED TO INSURE THAT ALL TREES NOT TO BE REMOVED SHALL BE HARMED AS LITTLE AS POSSIBLE DURING CONSTRUCTION OPERATION. CONTRACTOR SHALL BE RESPONSIBLE FOR DAMAGES TO EXISTING STRUCTURES, TREES, SIGNS OR OTHER IMPROVEMENTS ADJACENT TO THE WORK AREA.
3. CONTRACTOR SHALL NOTIFY ALL EXISTING UTILITY OWNERS BEFORE BEGINNING WORK ON THIS PROJECT.
4. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE PROTECTION OF ALL EXISTING UTILITIES OR SERVICE LINES CROSSED OR EXPOSED BY CONSTRUCTION OPERATIONS. WHERE EXISTING UTILITIES OR SERVICE LINES ARE CUT, BROKEN OR DAMAGED, THE CONTRACTOR SHALL REPLACE OR REPAIR THE UTILITIES OR SERVICE LINES WITH THE SAME TYPE OF ORIGINAL MATERIAL AND CONSTRUCTION, OR BETTER, AT THE CONTRACTOR'S EXPENSE.
5. THE CONTRACTOR SHALL PROVIDE FOR THE DIVERSION OF PEDESTRIANS AND VEHICLES DURING THE PROGRESS OF WORK IN A MANNER SATISFACTORY TO THE CONSTRUCTION ENGINEER. NO SEPARATE PAY ITEM.
6. THE CONTRACTOR IS RESPONSIBLE FOR KEEPING STREETS AND SIDEWALKS ADJACENT TO PROJECT FREE OF MUD AND DEBRIS. ENGINEER WILL PROVIDE A STORMWATER POLLUTION PREVENTION PLAN TO THE CONTRACTOR. ANY ADEQ FEES FOR THE PERMIT SHALL BE AT THE EXPENSE OF THE CONTRACTOR. THE CONTRACTOR AND ALL SUBCONTRACTORS SHALL ADHERE TO THE REQUIREMENTS OF THE SWP3. THE CONTRACTOR SHALL MAINTAIN EROSION CONTROLS THROUGHOUT THE THE PROJECT UNTIL COMPLETION AND PERMANENT VEGETATION IS ESTABLISHED.
7. CONTRACTOR SHALL RESTRICT ALL OPERATIONS TO INSIDE CITY RIGHT OF WAY.
8. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE PROJECT SPECIFICATIONS BY AN APPROVED THIRD PARTY TESTING LABORATORY. THE ENGINEER'S REPRESENTATIVE SHALL ALSO BE NOTIFIED PRIOR TO PERFORMING TESTING.
9. CONTRACTOR SHALL BE RESPONSIBLE FOR ALL CONSTRUCTION STAKING.
10. GRADING SHALL TYPICALLY FOLLOW EXISTING CURB LINE ELEVATIONS AND TYPICAL SECTIONS. TRANSITIONS TO EXISTING GRADES SHALL NOT EXCEED 3% LONGITUDINALLY.

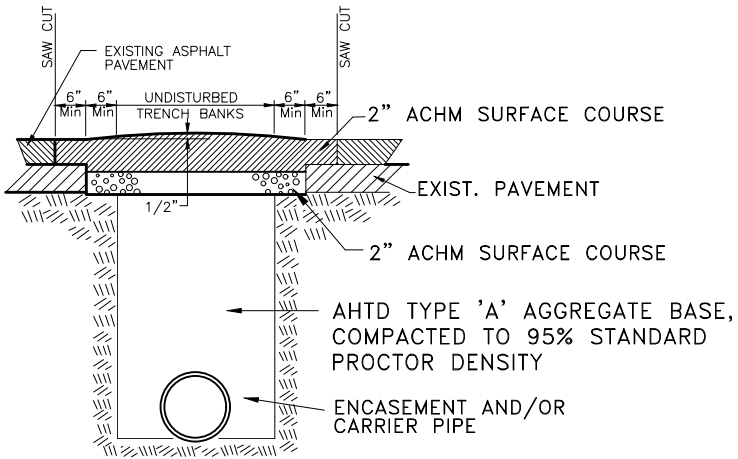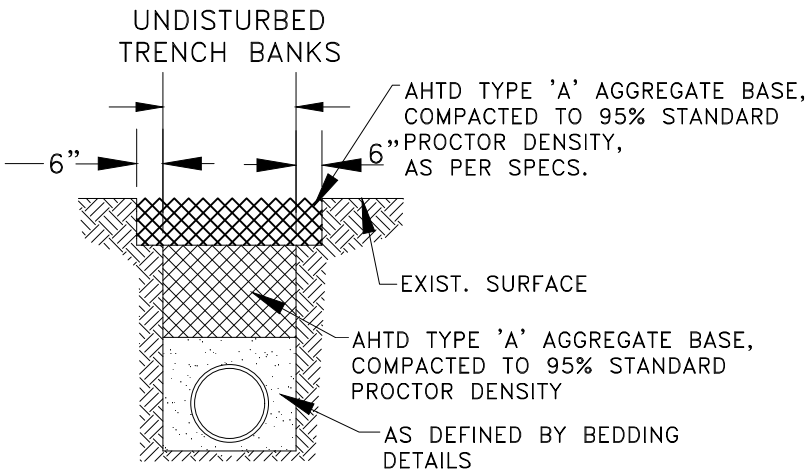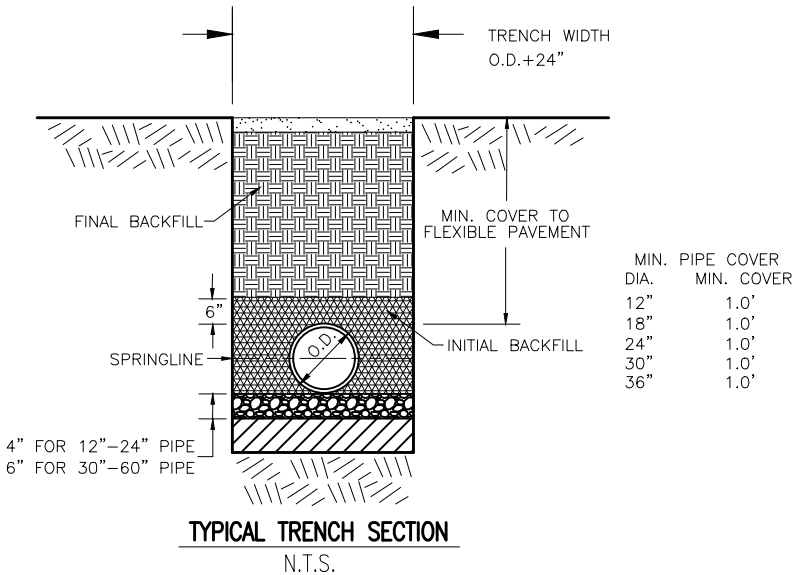

OPEN-CUT REPAIR DETAIL



ASPHALT PAVEMENT  
DRIVEWAYS, PARKING LOTS  
(EXCLUDES PUBLIC STREETS)

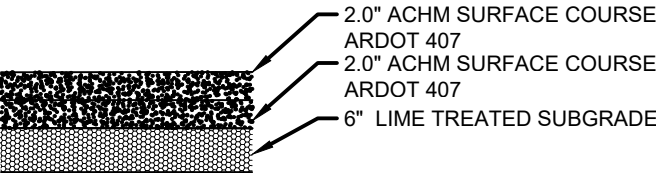


ASPHALT FULL DEPTH PAVEMENT SECTION

N.T.S.

- NOTE:
1. ASPHALT PAVEMENT SHALL FOLLOW GUIDANCE IN ARDOT DIVISION 400 FOR ASPHALT PAVEMENTS
2. PAVEMENT SECTIONS SHALL BE PREPARED ACCORDING TO THE GEOTECHNICAL REPORT PERFORMED BY UES DATE JUNE 21, 2026

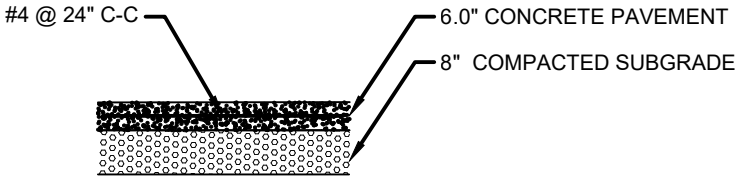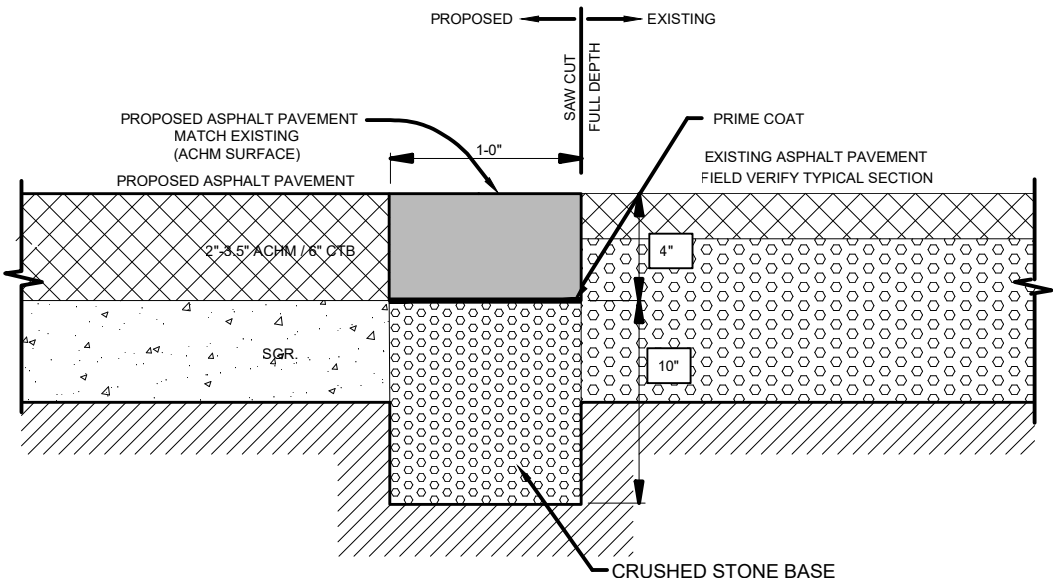

- NOTE:
1. CONCRETE SHALL HAVE A MINIMUM 3,500 28-DAY COMPRESSIVE STRENGTH W/4.5-6% ENTRAINED AIR. SUBGRADE SHALL BE COMPACTED TO 98% OF STANDARD PROCTOR +/-3% AND EXTEND A MINIMUM 1.0' BEYOND PAVEMENT EDGE.
2. REINFORCEMENT SHALL BE NO. 4 BARS @ 24" EACH WAY C-C.
3. ALL UNCURBED PAVEMENT EDGES TO BE THICKENED FOLLOWING GEOTECHNICAL REPORT GUIDANCE.
4. ALL PAVEMENT SECTIONS SHALL BE PREPARED ACCORDING TO THE GEOTECHNICAL REPORT PERFORMED BY GRUBBS, HOSKYN, BARTON & WYATT INC. CONSULTING ENGINEERS DATED AUGUST 5, 2022.

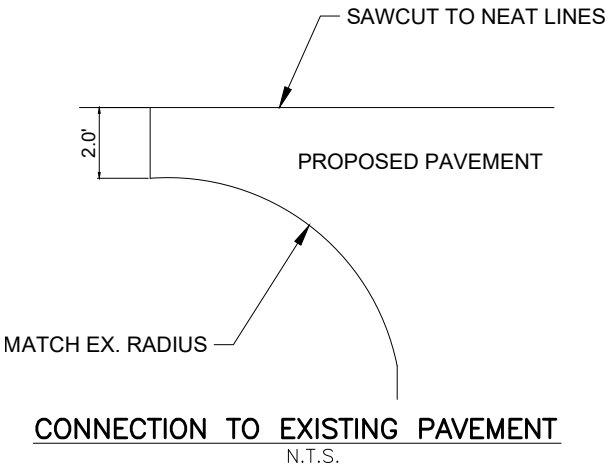

|         |                            |     |
|---------|----------------------------|-----|
| 8-12-26 | 1-OPEN CUT DETAIL MODIFIED | CJM |
|         |                            |     |
|         |                            |     |
|         |                            |     |
|         |                            |     |
| Date    | Revision                   | By  |

Designed CJM  
Checked KSB  
Drawn CJM  
Approved KSB



118 East Broad Street  
Texarkana, Arkansas 71854  
Phone (870) 216-1906  
Fax (870) 216-1907

CITY OF STUTTGART  
2026 STREET IMPROVEMENTS  
STUTTGART, ARKANSAS 72160

TYPICAL DETAILS

Job No.:ST-01-26  
Scale: N/A  
Date: 08/2026  
Sheet 19

8-12-26