

SEVIER COUNTY WATER AUTHORITY

TANK #4 (16'D x 80')

BID PROPOSAL

ITEM	QTY	UNIT	DESCRIPTION	TOTAL PRICE
1	1	L.S.	Blast and Re-coat the full interior of the Tank #4 Standpipe per plans and specifications for the lump sum price of	\$ _____
2	1	L.S.	Blast and Re-coat the full interior of the Tank #4 Standpipe per plans and specifications for the lump sum price of	\$ _____

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	TOTAL PRICE
3	1	L.S.	Furnish and Install new roof vent for the Tank #4 Standpipe per plans and Specifications including all labor, materials and #24 stainless steel mesh screen for the lump sum price of _____	\$ _____
4	1	L.S.	Furnish and Install _____ on all vents, opening _____ lump sum price of _____	\$ _____
_____ Dollars and Cents/L.S.				\$ _____

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	TOTAL PRICE
5	1	L.S.	Furnish and Install NSF approved caulk for the interior roof to rim angle connection for the lump sum price of	\$ _____

6	1	EA	Furnish and Install _____ access hatch on the _____ for the unit price of _____	\$ _____
			_____ Dollars and Cents/EA	\$ _____


BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	TOTAL PRICE
7	1	EA	Furnish and Replace 1/4" neoprene gasket on existing side manway access hatch per plans and specifications for the unit price of	\$ _____

8	1	L.S.	Furnish and Install _____ damage on all manways per _____ for the lump sum price	\$ _____
				\$ _____
			_____ Dollars and Cents/L.S.	

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	TOTAL PRICE
9	1	L.S.	Clean all dirt and foreign material from between tank bottom and concrete, re-caulk seam, and tighten all foundation anchor bolts, prior to blasting and coating for the lump sum price of _____ Dollars _____ _____ Dollars and Cents/EA	\$ _____
10	1	EA	Furnish and Install sampling str _____ specifications for the unit price of _____ _____ Dollars and Cents/EA	\$ _____ \$ _____

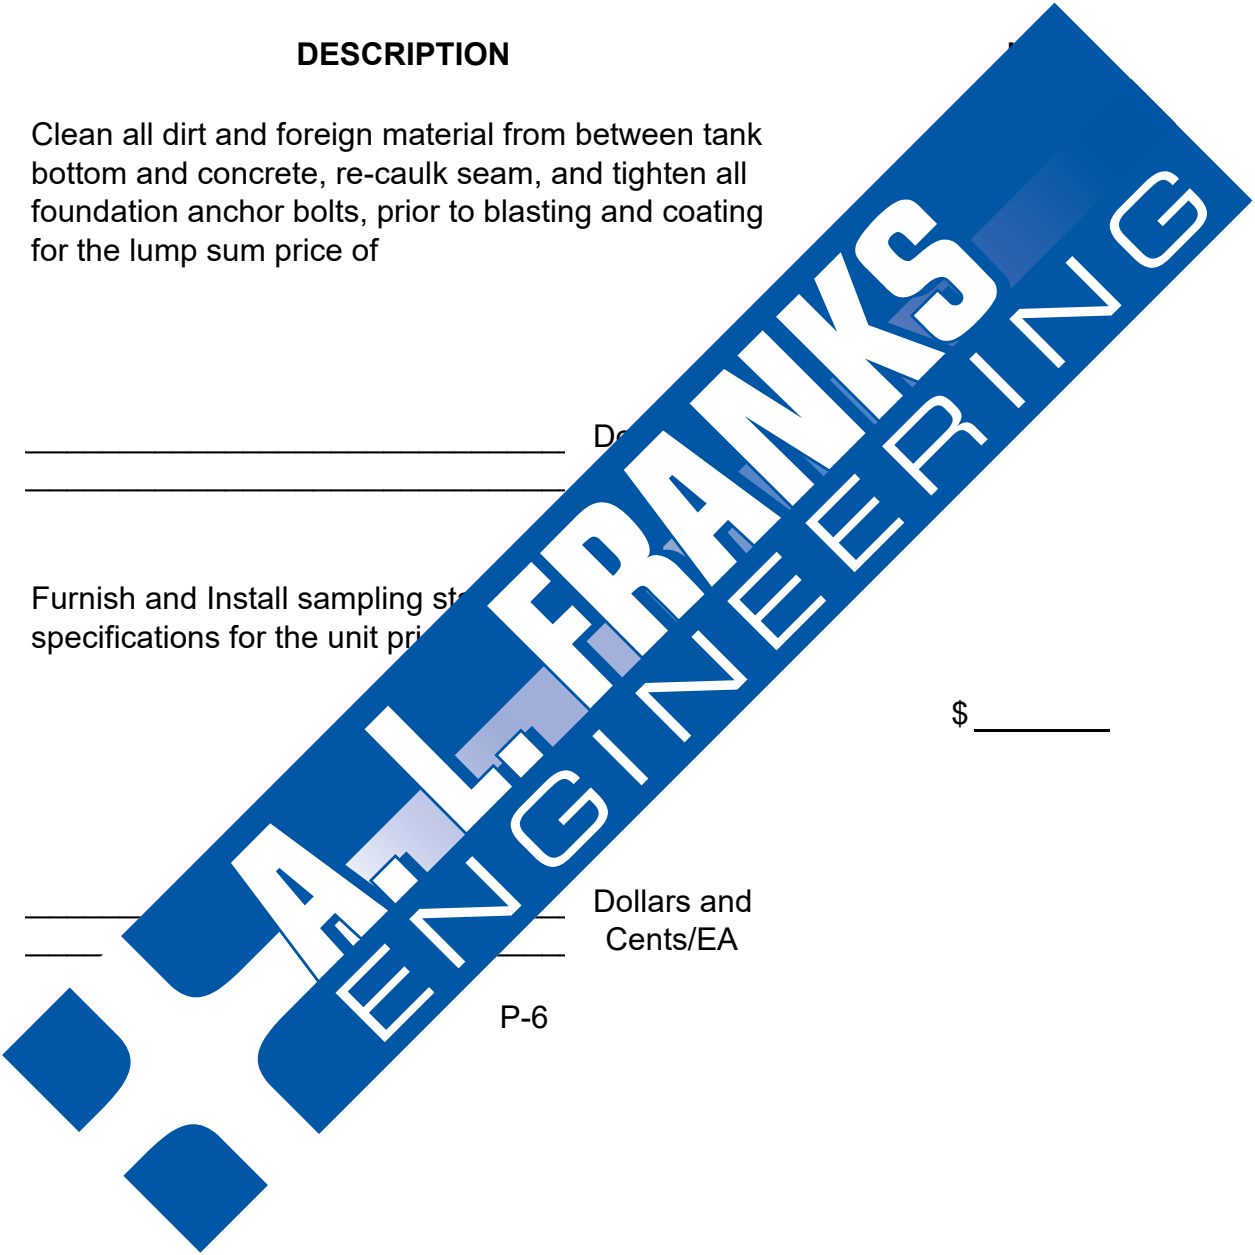

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	TOTAL PRICE
11	1	L.S.	Furnish and install all equipment material and labor to install 8" C-900 PVC riser with tideflex inlet and outlet valves per plans and specifications for the lump sum price of _____ Dollars _____ \$ _____	\$ _____
12	1	L.S.	Provide full containment for the _____ for the lump sum price of _____ _____ Dollars and Cents/L.S. _____	\$ _____ \$ _____

BID PROPOSAL CONTINUED

ITEM	QTY	UNIT	DESCRIPTION	TOTAL PRICE
13	1	L.S.	Provide Temporary water storage and pressure & pump communication for use throughout construction per Plans and specifications for the lump sum price of	\$ _____

_____ Do _____
_____ 3) \$ _____

NOTES:

- 1) Miscellaneous items, directed work, connections, etc. required to complete the proposed improvements to a complete and operational system shall be included in the appropriate Bid Item.
- 2) Time required to complete base bid work shall be _____
- 3) Contractor is solely responsible for following _____ and federal laws for lead abatement and disposal, as necessary.
- 4.) Due to global raw material shortage in the market, it is the best interest of the owner, engineer, and the job to purchase all coatings needed in one order. This will _____ and not slow due to unforeseen shortages.